



crazy about milling


CRAZYMILL COOL P&S

NEW: CORNER RADIUS

NEW

CrazyMill Cool P&S Corner Radius - Z3

PLUNGE AND SLOT ENDMILL WITH CORNER RADIUS

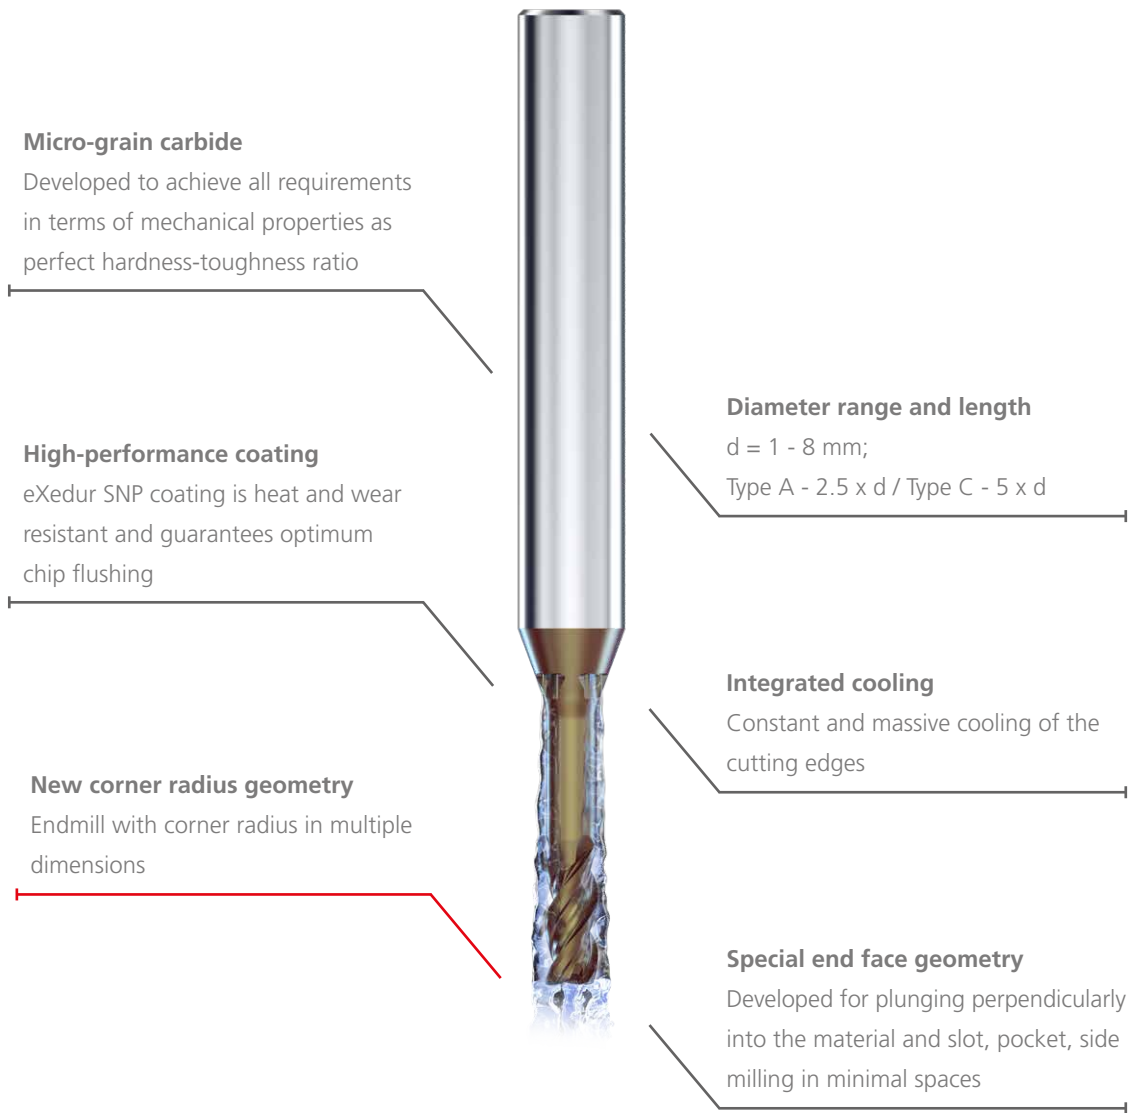

NEW

CRAZYMILL™
by Mikron Tool
Cool

Mikron Tool expands the CrazyMill Cool P&S family, developed for roughing and finishing operations. The new endmill is used for applications where a rounded corner is required. The new design of the cutting edges permits to machine many materials, with emphasis on stainless steels, titanium, CoCr alloys and super alloys. Due to its special features it can plunge perpendicularly into the material and is well adapted for milling of slots, pockets and sides in minimal spaces.

Advantages


- **SHORT MACHINING TIME** | Highest chip removal rate
- **LONG TOOL LIFE** | Thanks to efficient and patented cooling
- **EXCELLENT SURFACE QUALITY** | $Ra \leq 0.5 \mu m$
- **PERFECT CHIP CONTROL** | Thanks to specific geometry and greater coolant flow

Discover it!



NEW

P&S in medical applications

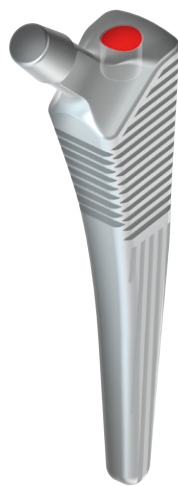

COMPONENT

Hip stem

MATERIAL

TiAl6V4-ELI / 3.7165 / ASTM F136


MACHINING

Helical interpolation and side milling of a flat hole

- Hole depth = 5 mm
- Hole diameter = 5.2 mm

TOOL

Mikron Tool - CrazyMill Cool P&S Corner radius - Type A



DATA	MIKRON TOOL	COMPETITOR
Tool type	CrazyMill Cool P&S Corner radius - Carbide - Coated - Integrated cooling	Conventional corner radius endmill - Carbide - Coated - External cooling
Item number	2.CMC42.A3Z3.400.1	-
Tool features	d ₁ = 4 mm l ₁ = 2.5 x d r = 0.5 mm Z = 3 flutes	d ₁ = 4 mm l ₁ = 3.75 x d r = 0.5 mm Z = 3 flutes
Cutting data	Helical interpolation v _c = 120 m/min f _z = 0.013 mm a _p = 1.0 mm a _e = 2.52 mm α = 15° Q = 0.94 cm³/min Δt = 13.2 s Finishing v _c = 120 m/min f _z = 0.022 mm a _p = 5 mm a _e = 0.08 mm Q = 0.29 cm ³ /min Δt = 1.3 s	Helical interpolation v _c = 52 m/min f _z = 0.026 mm a _p = 0.2 mm a _e = 2.52 mm α = 3.5° Q = 0.17 cm³/min Δt = 1 min 10 s Finishing v _c = 95 m/min f _z = 0.060 mm a _p = 5 mm a _e = 0.08 mm Q = 0.54 cm ³ /min Δt = 0.7 s



■ Results:


	CrazyMill Cool P&S Corner radius		Conventional corner radius endmill
Chip removal rate Q	Q = 0.94 cm ³ /min	5.5 x	Q = 0.17 cm ³ /min
Total cycle time	15 s	5 x	1 min 11 s

The combination of the newly developed cutting geometry and the patented integrated cooling system allows to achieve higher speed and depth a_p , as well as the pitch angle α . The result is a higher chip removal rate and a cycle time reduction of 5 times compared to a conventional corner radius tool.

Reduction of cycle time per part: 56 s

NEW

P&S in aerospace applications

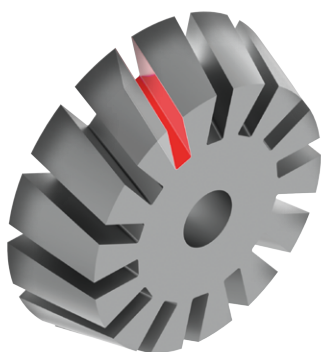

COMPONENT

Turbine rotor

MATERIAL

X12Cr13 / 1.4006 / AISI 410


MACHINING

Roughing and finishing of 14 slots

- Slot depth = 10 mm
- Slot length = 20 mm
- Slot width = 3.8 mm

TOOL

Mikron Tool - CrazyMill Cool P&S Corner radius - Type C



DATA	MIKRON TOOL	COMPETITOR
Tool type	CrazyMill Cool P&S Corner radius - Carbide - Coated - Integrated cooling	Conventional corner radius endmill - Carbide - Coated - External cooling
Item number	2.CMC42.C3Z3.370.1	-
Tool features	d ₁ = 3.7 mm l ₁ = 5 x d r = 0.5 mm Z = 3 flutes	d ₁ = 3.0 mm l ₁ = 3 x d r = 0.3 mm Z = 3 flutes
Cutting data	<p>Roughing</p> <p>v_c = 190 m/min f_z = 0.028 mm a_p = 1.85 mm a_e = 3.7 mm Q = 9.4 cm³/min Δt = 1 min 13 s</p> <p>Finishing</p> <p>v_c = 215 m/min f_z = 0.023 mm a_p = 5 a_e = 0.05 mm Q = 0.3 cm³/min Δt = 52 s</p>	<p>Roughing</p> <p>v_c = 44 m/min f_z = 0.015 mm a_p = 0.77 mm a_e = 3 mm Q = 0.5 cm³/min Δt = 16 min 42 s</p> <p>Semi-finishing</p> <p>v_c = 81 m/min f_z = 0.032 mm a_p = 0.77 mm a_e = 0.34 mm Q = 0.22 cm³/min Δt = 8 min 45 s</p> <p>Finishing</p> <p>v_c = 105 m/min f_z = 0.052 mm a_p = 5 a_e = 0.06 mm Q = 0.5 cm³/min Δt = 39 s</p>



■ Results:


	CrazyMill Cool P&S Corner radius	Conventional corner radius endmill
Chip removal rate Q	Q = 9.4 cm ³ /min 19 x	Q = 0.5 cm ³ /min
Total cycle time	2 min 5 s 12 x	26 min 6 s

The combination of the newly developed cutting geometry and the patented integrated cooling system allows to achieve higher speed and depth a_p , as well as the pitch angle α . The result is a chip removal rate 19 times higher and a cycle time reduction of 12 times compared to a conventional corner radius tool.

Reduction of cycle time per part: 24 min

NEW

P&S in other applications

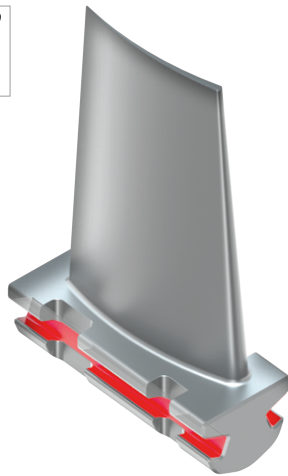


3. Turbine blade

Material: X5NiCrTi26-15 / 1.4943 / Incoloy A-286

Machining: Roughing and finishing slotting

- Slot depth = 4.6 mm
- Slot length = 10 mm
- Slot width = 2.6 mm

	Mikron Tool	Competitor
Total cycle time	16 s 15 x	4 min 8 s

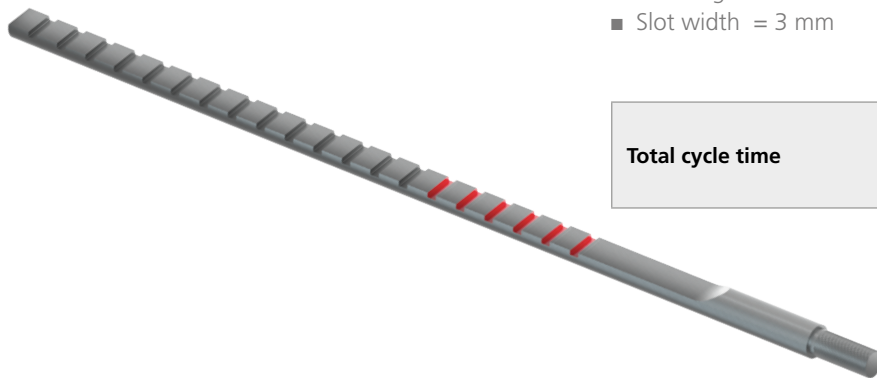

4. Transmission system


Material: X40CrMoV5-1 / 1.2344 / AISI H13

Machining: Roughing 20 slots (batch 100 pcs)

- Slot depth = 1.5 mm
- Slot length = 10 mm
- Slot width = 3 mm

	Mikron Tool	Competitor
Total cycle time	15 min 3 x	45 min 30 s

NEW

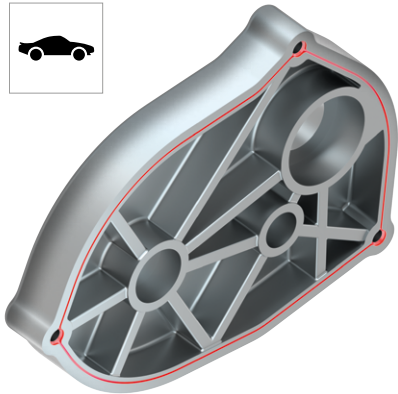


5. Gear box cover

Material: GGG60 / 0.7060 / ASTM 80-60-03

Machining: Linear ramp and slot milling of gasket seat

- Slot depth = 2 mm
- Slot length = 800 mm
- Slot width = 2 mm

	Mikron Tool	Competitor
Total cycle time	1 min 45 s 2 x	3 min 10 s

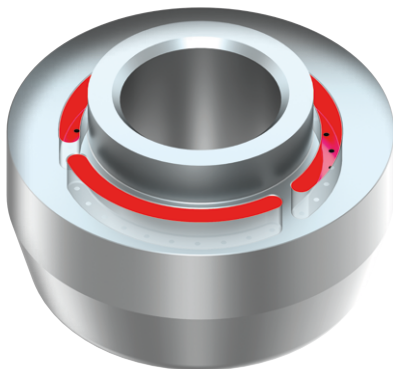

6. Paint atomizer

Material: TiAl6V4-ELI / 3.7165 / ASTM F136

Machining: Plunging, roughing and finishing slotting

- Slot depth = 8 mm
- Slot length = 210 mm
- Slot width = 5.2 mm


	Mikron Tool	Competitor
Total cycle time	2 min 10 s 2 x	3 min 56 s

NEW

One tool for many applications



MILLING PROCESS

CrazyMill Cool P&S Corner radius for:

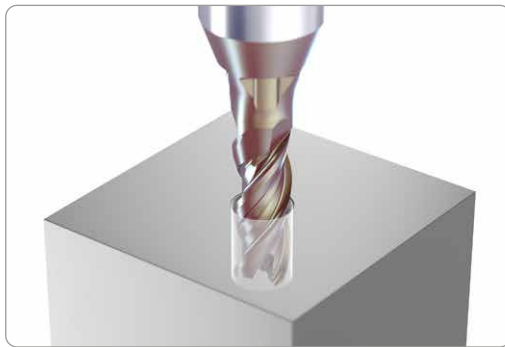



1. Plunge milling

Direct or with helical interpolation

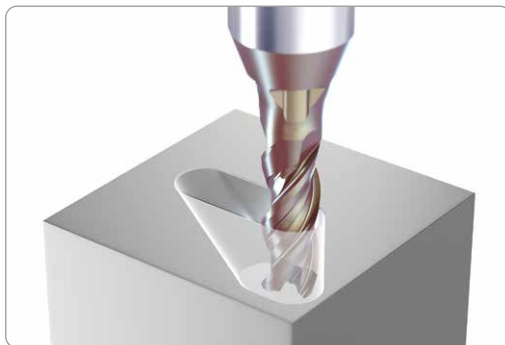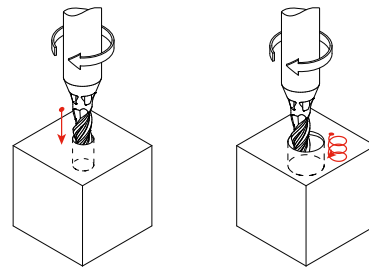


2. Linear ramp milling


Angle depending on material

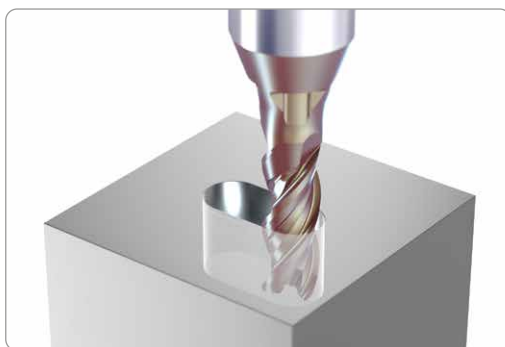

3. Slot milling



Pockets or through slots

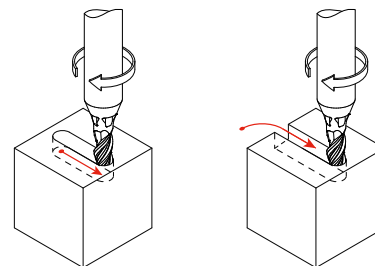

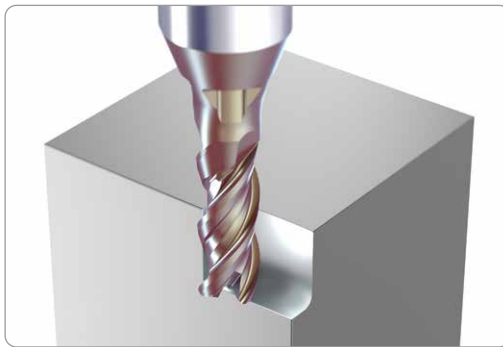


4. Side milling - Semi-finishing

$$a_p = 1 - 2 \times d$$

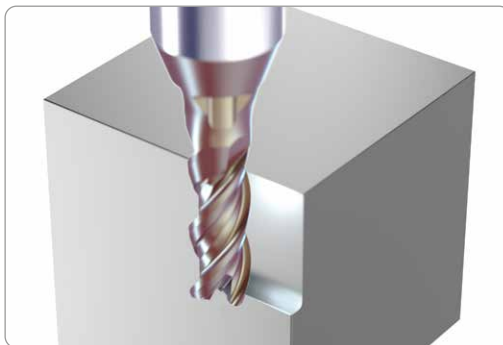

5. Side milling - Finishing

$$a_p = 2.5 \times d - \text{Type A} / a_p = 2 \times d - \text{Type C}$$



NEW

Highest performance in smallest dimensions

PLUNGE AND SLOT ENDMILL WITH INTEGRATED COOLING

With CrazyMill Cool P&S Corner radius Mikron Tool expands its range of milling cutters for difficult to machine materials. The new endmill is used for applications where a rounded corner is required. The three flute CrazyMill Cool P&S Corner radius allows perpendicular plunging with subsequent milling into solid material. It is available with integrated cooling, in the diameter range from 1 mm to 8 mm and for maximal milling depth of 5 x d.

- CrazyMill Cool P&S Corner radius, type A – milling depth 2.5 x d, cutting length 2.5 x d, through shaft cooling, Z = 3
- CrazyMill Cool P&S Corner radius, type C – milling depth 5 x d, cutting length 2 x d, through shaft cooling, Z = 3

2.5 x d

5 x d

Type A

Type C

- Coated
- Integrated cooling

- Coated
- Integrated cooling



page 14

page 24

NEW

1 | SHANK

The robust carbide shank guarantees stable and vibration-free milling. A high degree of precision and excellent surface quality is achieved.

2 | INTEGRATED COOLING – PATENTED

The integrated cooling channels guarantee constant and maximal cooling of the cutting edges and optimal chip removal. The result is higher cutting speed and depth as well as improved surface quality.

3 | CARBIDE

The specially developed micro-grain carbide meets all requirements in terms of mechanical properties.

4 | COATING

The high-performance eXedur SNP coating is heat and wear resistant, prevents material build-up on cutting edges and guarantees optimum chip flushing. The result is long tool life.


5 | FLUTE GEOMETRY

The specially designed flutes provide high stability and sufficient space for perfect chip evacuation.

6 | GEOMETRY OF THE END FACE

The specially designed expanded chip collection section in the end face guarantees good chip evacuation when plunging. A correction in the web prevents edge breakout, reduces the penetration force and increases tool life.

End face geometry - 3 Flutes




NEW

Type A - 2.5 x d - Corner radius - Z3








MILLING WITH INTEGRATED COOLING

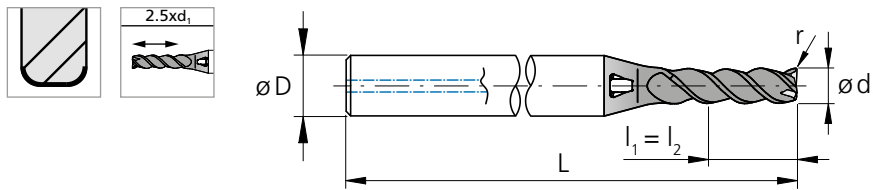P&S - Corner radius



d ₁	d ₁	l ₁	l ₂	D	L	r	r	Item number	Availability
[mm]	[inch]	[mm]	[mm]	(h6) [mm]	[mm]	[mm]	[inch]		
1.0		2.50	2.50	4	40	0.10		2.CMC42.A2Z3.100.1	■
1.0		2.50	2.50	4	40	0.20		2.CMC42.A3Z3.100.1	■
1.1		2.75	2.75	4	40	0.10		2.CMC42.A2Z3.110.1	■
1.1		2.75	2.75	4	40	0.20		2.CMC42.A3Z3.110.1	■
1.2		3.00	3.00	4	40	0.10		2.CMC42.A2Z3.120.1	■
1.2		3.00	3.00	4	40	0.20		2.CMC42.A3Z3.120.1	■
1.3		3.25	3.25	4	40	0.10		2.CMC42.A2Z3.130.1	■
1.3		3.25	3.25	4	40	0.20		2.CMC42.A3Z3.130.1	■
1.4		3.50	3.50	4	40	0.10		2.CMC42.A2Z3.140.1	■
1.4		3.50	3.50	4	40	0.20		2.CMC42.A3Z3.140.1	■
1.5		3.75	3.75	4	40	0.10		2.CMC42.A2Z3.150.1	■
1.5		3.75	3.75	4	40	0.30		2.CMC42.A3Z3.150.1	■
1.587	1/16	3.97	3.97	4	40	0.127	.005	2.CMC.PSRA2Z3.F116	■
1.587	1/16	3.97	3.97	4	40	0.254	.010	2.CMC.PSRA3Z3.F116	■
1.6		4.00	4.00	4	40	0.10		2.CMC42.A2Z3.160.1	■
1.6		4.00	4.00	4	40	0.30		2.CMC42.A3Z3.160.1	■
1.7		4.25	4.25	4	40	0.10		2.CMC42.A2Z3.170.1	■
1.7		4.25	4.25	4	40	0.30		2.CMC42.A3Z3.170.1	■
1.8		4.50	4.50	4	40	0.10		2.CMC42.A2Z3.180.1	■
1.8		4.50	4.50	4	40	0.30		2.CMC42.A3Z3.180.1	■
1.9		4.75	4.75	4	40	0.10		2.CMC42.A2Z3.190.1	■
1.9		4.75	4.75	4	40	0.30		2.CMC42.A3Z3.190.1	■
2.0		5.00	5.00	4	40	0.10		2.CMC42.A2Z3.200.1	■
2.0		5.00	5.00	4	40	0.20		2.CMC42.A3Z3.200.1	■
2.0		5.00	5.00	4	40	0.50		2.CMC42.A4Z3.200.1	■
2.1		5.25	5.25	4	40	0.20		2.CMC42.A2Z3.210.1	■
2.1		5.25	5.25	4	40	0.50		2.CMC42.A3Z3.210.1	■
2.2		5.50	5.50	4	40	0.20		2.CMC42.A2Z3.220.1	■
2.2		5.50	5.50	4	40	0.50		2.CMC42.A3Z3.220.1	■
2.3		5.75	5.75	4	40	0.20		2.CMC42.A2Z3.230.1	■
2.3		5.75	5.75	4	40	0.50		2.CMC42.A3Z3.230.1	■
2.381	3/32	5.95	5.95	4	40	0.127	.005	2.CMC.PSRA2Z3.F332	■
2.381	3/32	5.95	5.95	4	40	0.254	.010	2.CMC.PSRA3Z3.F332	■
2.381	3/32	5.95	5.95	4	40	0.381	.015	2.CMC.PSRA4Z3.F332	■
2.4		6.00	6.00	4	40	0.20		2.CMC42.A2Z3.240.1	■
2.4		6.00	6.00	4	40	0.50		2.CMC42.A3Z3.240.1	■
2.5		6.25	6.25	6	50	0.20		2.CMC42.A2Z3.250.1	■
2.5		6.25	6.25	6	50	0.50		2.CMC42.A3Z3.250.1	■
2.6		6.50	6.50	6	50	0.20		2.CMC42.A2Z3.260.1	■
2.6		6.50	6.50	6	50	0.50		2.CMC42.A3Z3.260.1	■
2.7		6.75	6.75	6	50	0.20		2.CMC42.A2Z3.270.1	■
2.7		6.75	6.75	6	50	0.50		2.CMC42.A3Z3.270.1	■

■ Stock item

Carbide	Z3							
		$\varnothing d_1$	1.0 - 3.0 mm	3.1 - 6.0 mm	6.1 - 8.0 mm	r	0.1 - 1.524 mm	
		Tolerance	- 0.014 mm - 0.028 mm	- 0.020 mm - 0.038 mm	- 0.025 mm - 0.047 mm	Tolerance	$\pm 0.05 \cdot r$ mm	

d_1	d_1	l_1	l_2	D	L	r	r	Item number	Availability
[mm]	[inch]	[mm]	[mm]	(h6) [mm]	[mm]	[mm]	[inch]		
2.8		7.00	7.00	6	50	0.20		2.CMC42.A2Z3.280.1	■
2.8		7.00	7.00	6	50	0.50		2.CMC42.A3Z3.280.1	■
2.9		7.25	7.25	6	50	0.20		2.CMC42.A2Z3.290.1	■
2.9		7.25	7.25	6	50	0.50		2.CMC42.A3Z3.290.1	■
3.0		7.50	7.50	6	50	0.20		2.CMC42.A2Z3.300.1	■
3.0		7.50	7.50	6	50	0.50		2.CMC42.A3Z3.300.1	■
3.1		7.75	7.75	6	50	0.20		2.CMC42.A2Z3.310.1	■
3.1		7.75	7.75	6	50	0.50		2.CMC42.A3Z3.310.1	■
3.175	1/8	7.94	7.94	6	50	0.254	.010	2.CMC.PSRA2Z3.F18	■
3.175	1/8	7.94	7.94	6	50	0.381	.015	2.CMC.PSRA3Z3.F18	■
3.3		8.25	8.25	6	50	0.20		2.CMC42.A2Z3.330.1	■
3.3		8.25	8.25	6	50	0.50		2.CMC42.A3Z3.330.1	■
3.7		9.25	9.25	6	50	0.20		2.CMC42.A2Z3.370.1	■
3.7		9.25	9.25	6	50	0.50		2.CMC42.A3Z3.370.1	■
3.968	5/32	9.92	9.92	6	50	0.254	.010	2.CMC.PSRA2Z3.F532	■
3.968	5/32	9.92	9.92	6	50	0.381	.015	2.CMC.PSRA3Z3.F532	■
4.0		10.00	10.00	6	50	0.20		2.CMC42.A2Z3.400.1	■
4.0		10.00	10.00	6	50	0.50		2.CMC42.A3Z3.400.1	■
4.3		10.75	10.75	8	60	0.20		2.CMC42.A2Z3.430.1	■
4.3		10.75	10.75	8	60	0.50		2.CMC42.A3Z3.430.1	■
4.7		11.75	11.75	8	60	0.20		2.CMC42.A2Z3.470.1	■
4.7		11.75	11.75	8	60	0.50		2.CMC42.A3Z3.470.1	■
4.762	3/16	11.91	11.91	8	60	0.254	.010	2.CMC.PSRA2Z3.F316	■
4.762	3/16	11.91	11.91	8	60	0.381	.015	2.CMC.PSRA3Z3.F316	■
4.8		12.00	12.00	8	60	0.20		2.CMC42.A2Z3.480.1	■
4.8		12.00	12.00	8	60	0.50		2.CMC42.A3Z3.480.1	■
5.0		12.50	12.50	8	60	0.20		2.CMC42.A2Z3.500.1	■
5.0		12.50	12.50	8	60	0.50		2.CMC42.A3Z3.500.1	■
5.3		13.25	13.25	10	65	0.20		2.CMC42.A2Z3.530.1	■
5.3		13.25	13.25	10	65	0.50		2.CMC42.A3Z3.530.1	■
5.560	7/32	13.90	13.90	10	65	0.381	.015	2.CMC.PSRA2Z3.F732	■
5.560	7/32	13.90	13.90	10	65	0.762	.030	2.CMC.PSRA3Z3.F732	■
5.7		14.25	14.25	10	65	0.20		2.CMC42.A2Z3.570.1	■
5.7		14.25	14.25	10	65	0.50		2.CMC42.A3Z3.570.1	■
6.0		15.00	15.00	10	65	0.20		2.CMC42.A2Z3.600.1	■
6.0		15.00	15.00	10	65	0.50		2.CMC42.A3Z3.600.1	■
6.0		15.00	15.00	10	65	1.00		2.CMC42.A4Z3.600.1	■
6.350	1/4	15.88	15.88	10	65	0.381	.015	2.CMC.PSRA2Z3.F14	■
6.350	1/4	15.88	15.88	10	65	0.762	.030	2.CMC.PSRA3Z3.F14	■
6.350	1/4	15.88	15.88	10	65	1.524	.060	2.CMC.PSRA4Z3.F14	■
8.0		20.00	20.00	12	70	0.20		2.CMC42.A2Z3.800.1	■
8.0		20.00	20.00	12	70	0.50		2.CMC42.A3Z3.800.1	■
8.0		20.00	20.00	12	70	1.50		2.CMC42.A4Z3.800.1	■

■ Stock item


NEW

Type A - Keyways - Plunge - Slot milling

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW


Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm			
					v_c	$f_{z,p}$	$f_{z,s}$	a_p
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	100	0.0013	0.0046	1xd1
		1.0401	C15	AISI 1015				
		1.1191	C45E/CK45	AISI 1045				
		1.0044	S275JR	AISI 1020				
		1.0715	11SMn30	AISI 1215				
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310	100	0.0014	0.0049	1xd1
		1.7131	16MnCr5	AISI 5115				
		1.3505	100Cr6	AISI 52100				
		1.7225	42CrMo4	AISI 4140				
		1.2842	90MnCrV8	AISI O2				
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2	100	0.0012	0.0042	0.5xd1
		1.2436	X210CrW12	AISI D4/D6				
		1.3343	H56-5-2C	AISI M2 / UNS T11302				
		1.3355	H518-0-1	AISI T1 / UNS T12001				
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	100	0.0010	0.0035	1xd1
		1.4105	X6CrMoS17	AISI 430F				
		1.4034	X46Cr13	AISI 420C				
	Stainless steel martensitic	1.4112	X90CrMoV18	AISI 440B	100	0.0010	0.0035	0.5xd1
		1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH				
	Stainless steel martensitic - PH	1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH	100	0.0010	0.0035	0.5xd1
		1.4301	X5CrNi18-10	AISI 304				
	Stainless steel austenitic	1.4435	X2CrNiMo18-14-3	AISI 316L	100	0.0010	0.0035	1xd1
		1.4441	X2CrNiMo18-15-3	AISI 316LM				
1.4539		X1NiCrMoCu25-20-5	AISI 904L					
K	Cast iron	0.6020	GG20	ASTM 30	100	0.0013	0.0042	1xd1
		0.6030	GG30	ASTM 40B				
		0.7040	GGG40	ASTM 60-40-18				
		0.7060	GGG60	ASTM 80-60-03				
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	100	0.0012	0.0100	1xd1
		3.4365	AlZnMgCu1.5	ASTM 7075				
	Aluminium alloy cast	3.2163	GD-ALSi9Cu3	ASTM A380	100	0.0012	0.0100	1xd1
		3.2381	GD-ALSi10Mg	UNS A03590				
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	100	0.0012	0.0100	1xd1
		2.0065	Cu-ETP / CW004A	UNS C11000				
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	100	0.0012	0.0100	1xd1
		2.0360	CuZn40 CW509L	UNS C28000				
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0401	CuZn39Pb3 / CW614N	UNS C38500	100	0.0012	0.0100	1xd1
		2.1020	CuSn6	UNS C51900				
	Bronze $R_m < 600 \text{ N/mm}^2$	2.0966	CuAl10Ni5Fe4	UNS C63000	100	0.0012	0.0100	1xd1
		2.0960	CuAl9Mn2	UNS C63200				
S₁	Super alloys	2.4856		Inconel 625	40	0.0010	0.0035	0.25xd1
		2.4668		Inconel 718				
		2.4617	NiMo28	Hastelloy B-2				
		2.4665	NiCr22Fe18Mo	Hastelloy X				
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	80	0.0010	0.0032	0.25xd1
		3.7065	Gr.4	ASTM B348 / F68				
S₃	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	80	0.0010	0.0032	0.25xd1
		9.9367	TiAl6Nb7	ASTM F1295				
H₁	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	60	0.0010	0.0035	0.5xd1
			CrCoMo28	ASTM F1537				
H₂	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1				
		1.2379	X153CrMoV12	AISI D2				

Keyway slot milling




- $f_{z,p}$: for plunge milling
- $f_{z,s}$: for slot milling

Plunge milling






- $f_{z,p}$: for plunge milling

Slot milling



- $f_{z,p}$: for plunge milling
- $f_{z,s}$: for slot milling



v_c [m/min] a_p [mm]
 $f_{z,p}$ [mm] $f_{z,s}$ [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ☒ Not recommended

P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂

$\varnothing d_1$																											
1.5 mm 1/16"				2.0 mm 3/32"				3.0 mm 1/8"				4.0 mm 5/32"				5.0 mm 3/16" - 7/32"				6.0 mm - 8.0 mm 1/4"							
v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p				
120	0.0020	0.0065	1xd1	120	0.0026	0.0091	1xd1	140	0.004	0.013	1xd1	140	0.005	0.020	1xd1	150	0.005	0.026	1xd1	160	0.006	0.033	1xd1				
120	0.0021	0.0070	1xd1	120	0.0028	0.0098	1xd1	140	0.004	0.014	1xd1	140	0.005	0.021	1xd1	150	0.006	0.027	1xd1	160	0.006	0.034	1xd1				
120	0.0018	0.0060	0.5xd1	120	0.0024	0.0084	0.5xd1	140	0.003	0.012	0.5xd1	140	0.004	0.017	0.5xd1	150	0.004	0.022	0.5xd1	160	0.005	0.028	0.5xd1				
120	0.0015	0.0050	1xd1	120	0.0020	0.0070	1xd1	140	0.003	0.010	1xd1	140	0.004	0.015	1xd1	150	0.004	0.020	1xd1	160	0.005	0.025	1xd1				
120	0.0015	0.0050	0.5xd1	120	0.0020	0.0070	0.5xd1	140	0.003	0.010	0.5xd1	140	0.004	0.015	0.5xd1	150	0.004	0.020	0.5xd1	160	0.005	0.025	0.5xd1				
120	0.0015	0.0050	0.5xd1	120	0.0020	0.0070	0.5xd1	140	0.003	0.010	0.5xd1	140	0.004	0.015	0.5xd1	150	0.004	0.020	0.5xd1	160	0.005	0.025	0.5xd1				
120	0.0015	0.0050	1xd1	120	0.0020	0.0070	1xd1	140	0.003	0.010	1xd1	140	0.004	0.015	1xd1	150	0.004	0.020	1xd1	160	0.005	0.025	1xd1				
120	0.0019	0.0060	1xd1	120	0.0024	0.0084	1xd1	140	0.004	0.012	1xd1	140	0.004	0.017	1xd1	150	0.005	0.022	1xd1	160	0.005	0.028	1xd1				
120	0.0018	0.0160	1xd1	120	0.0024	0.0210	1xd1	150	0.004	0.034	1xd1	160	0.004	0.035	1xd1	170	0.005	0.036	1xd1	180	0.005	0.037	1xd1				
120	0.0018	0.0160	1xd1	120	0.0024	0.0210	1xd1	150	0.004	0.034	1xd1	160	0.004	0.035	1xd1	170	0.005	0.036	1xd1	180	0.005	0.037	1xd1				
120	0.0018	0.0160	1xd1	120	0.0024	0.0210	1xd1	150	0.004	0.034	1xd1	160	0.004	0.035	1xd1	170	0.005	0.036	1xd1	180	0.005	0.037	1xd1				
120	0.0018	0.0160	1xd1	120	0.0024	0.0210	1xd1	150	0.004	0.034	1xd1	160	0.004	0.035	1xd1	170	0.005	0.036	1xd1	180	0.005	0.037	1xd1				
120	0.0018	0.0160	1xd1	120	0.0024	0.0210	1xd1	150	0.004	0.034	1xd1	160	0.004	0.035	1xd1	170	0.005	0.036	1xd1	180	0.005	0.037	1xd1				
120	0.0018	0.0160	1xd1	120	0.0024	0.0210	1xd1	150	0.004	0.034	1xd1	160	0.004	0.035	1xd1	170	0.005	0.036	1xd1	180	0.005	0.037	1xd1				
40	0.0015	0.0050	0.25xd1	50	0.0020	0.0070	0.25xd1	50	0.003	0.010	0.25xd1	60	0.004	0.014	0.25xd1	80	0.004	0.018	0.25xd1	80	0.005	0.021	0.25xd1				
90	0.0014	0.0045	0.25xd1	100	0.0018	0.0063	0.25xd1	110	0.003	0.010	0.25xd1	120	0.004	0.013	0.25xd1	120	0.004	0.016	0.25xd1	120	0.005	0.019	0.25xd1				
90	0.0014	0.0045	0.25xd1	100	0.0018	0.0063	0.25xd1	110	0.003	0.010	0.25xd1	120	0.004	0.013	0.25xd1	120	0.004	0.016	0.25xd1	120	0.005	0.019	0.25xd1				
60	0.0015	0.0050	0.5xd1	80	0.0020	0.0070	0.5xd1	80	0.003	0.010	0.5xd1	100	0.004	0.014	0.5xd1	100	0.004	0.018	0.5xd1	120	0.005	0.021	0.5xd1				

NEW

Type A - Milling of through slots

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

	Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm		
						v_c	f_z	a_p
<p>Through slot milling</p>    	P	Unalloyed carbon steel Rm < 800 N/mm ²	1.0301	C10	AISI 1010	140	0.009	1xd1
			1.0401	C15	AISI 1015			
			1.1191	C45E/CK45	AISI 1045			
			1.0044	S275JR	AISI 1020			
			1.0715	11SMn30	AISI 1215			
		Low alloyed steel Rm > 900 N/mm ²	1.5752	15NiCr13	ASTM 3415 / AISI 3310	140	0.008	1xd1
			1.7131	16MnCr5	AISI 5115			
			1.3505	100Cr6	AISI 52100			
			1.7225	42CrMo4	AISI 4140			
			1.2842	90MnCrV8	AISI O2			
		High alloyed tool steel Rm < 1200 N/mm ²	1.2379	X153CrMoV12	AISI D2	140	0.006	0.5xd1
			1.2436	X210CrW12	AISI D4/D6			
			1.3343	HS6-5-2C	AISI M2 / UNS T11302			
			1.3355	HS18-0-1	AISI T1 / UNS T12001			
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	140	0.009	1xd1	
		1.4105	X6CrMoS17	AISI 430F				
		1.4034	X46Cr13	AISI 420C				
	Stainless steel martensitic	1.4112	X90CrMoV18	AISI 440B	140	0.009	1xd1	
		1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH				
	Stainless steel martensitic – PH	1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH	140	0.009	1xd1	
		1.4301	X5CrNi18-10	AISI 304				
	Stainless steel austenitic	1.4435	X2CrNiMo18-14-3	AISI 316L	140	0.007	1xd1	
		1.4441	X2CrNiMo18-15-3	AISI 316LM				
1.4539		X1NiCrMoCu25-20-5	AISI 904L					
K	Cast iron	0.6020	GG20	ASTM 30	120	0.007	1xd1	
		0.6030	GG30	ASTM 40B				
		0.7040	GGG40	ASTM 60-40-18				
		0.7060	GGG60	ASTM 80-60-03				
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	140	0.010	1xd1	
		3.4365	AlZnMgCu1.5	ASTM 7075				
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	140	0.010	1xd1	
		3.2381	GD-AlSi10Mg	UNS A03590				
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	140	0.012	1xd1	
		2.0065	Cu-ETP / CW004A	UNS C11000				
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	140	0.012	1xd1	
		2.0360	CuZn40 CW509L	UNS C28000				
	Brass, Bronze Rm < 400 N/mm ²	2.0401	CuZn39Pb3 / CW614N	UNS C38500	140	0.012	1xd1	
		2.1020	CuSn6	UNS C51900				
	Bronze Rm < 600 N/mm ²	2.0966	CuAl10Ni5Fe4	UNS C63000	140	0.011	1xd1	
2.0960		CuAl9Mn2	UNS C63200					
S₁	Super alloys	2.4856		Inconel 625	80	0.005	0.5xd1	
		2.4668		Inconel 718				
		2.4617	NiMo28	Hastelloy B-2				
		2.4665	NiCr22Fe18Mo	Hastelloy X				
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	100	0.009	0.5xd1	
		3.7065	Gr.4	ASTM B348 / F68				
S₃	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	100	0.009	0.5xd1	
		9.9367	TiAl6Nb7	ASTM F1295				
S₃	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	80	0.005	0.5xd1	
			CrCoMo28	ASTM F1537				
H₁	Hardened steel < 55 HRC	1.2510	100MnCrMoW4	AISI O1				
H₂	Hardened steel ≥ 55 HRC	1.2379	X153CrMoV12	AISI D2				

v_c [m/min]
 f_z [mm]
 a_p [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ☒ Not recommended

P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂


	1.5 mm 1/16"			2.0 mm 3/32"			3.0 mm 1/8"			4.0 mm 5/32"			5.0 mm 3/16" - 7/32"			6.0 mm - 8.0 mm 1/4"		
	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p
	180	0.015	1xd1	200	0.020	1xd1	220	0.029	1xd1	230	0.031	1xd1	240	0.031	1xd1	260	0.032	1xd1
	180	0.013	1xd1	200	0.019	1xd1	220	0.028	1xd1	230	0.029	1xd1	240	0.030	1xd1	260	0.031	1xd1
	180	0.012	0.5xd1	200	0.017	0.5xd1	220	0.025	0.5xd1	230	0.026	0.5xd1	240	0.026	0.5xd1	260	0.027	0.5xd1
	180	0.015	1xd1	200	0.020	1xd1	220	0.028	1xd1	230	0.029	1xd1	240	0.030	1xd1	260	0.031	1xd1
	180	0.013	1xd1	200	0.019	1xd1	220	0.027	1xd1	230	0.028	1xd1	240	0.029	1xd1	260	0.029	1xd1
	180	0.013	1xd1	200	0.019	1xd1	220	0.027	1xd1	230	0.028	1xd1	240	0.029	1xd1	260	0.029	1xd1
	180	0.011	1xd1	200	0.017	1xd1	220	0.025	1xd1	230	0.027	1xd1	240	0.027	1xd1	260	0.028	1xd1
	140	0.015	1xd1	160	0.017	1xd1	180	0.025	1xd1	200	0.031	1xd1	200	0.031	1xd1	200	0.032	1xd1
	180	0.016	1xd1	200	0.021	1xd1	220	0.034	1xd1	260	0.035	1xd1	300	0.036	1xd1	340	0.037	1xd1
	180	0.016	1xd1	200	0.021	1xd1	220	0.032	1xd1	260	0.034	1xd1	300	0.034	1xd1	340	0.036	1xd1
	180	0.016	1xd1	200	0.021	1xd1	220	0.034	1xd1	260	0.035	1xd1	300	0.036	1xd1	340	0.037	1xd1
	180	0.016	1xd1	200	0.021	1xd1	220	0.034	1xd1	260	0.035	1xd1	300	0.036	1xd1	340	0.037	1xd1
	180	0.016	1xd1	200	0.021	1xd1	220	0.034	1xd1	260	0.035	1xd1	300	0.036	1xd1	340	0.037	1xd1
	180	0.016	1xd1	200	0.021	1xd1	220	0.034	1xd1	260	0.035	1xd1	300	0.036	1xd1	340	0.037	1xd1
	80	0.006	0.5xd1	100	0.007	0.5xd1	100	0.010	0.5xd1	120	0.013	0.5xd1	120	0.013	0.5xd1	120	0.013	0.5xd1
	100	0.012	0.5xd1	120	0.017	0.5xd1	120	0.027	0.5xd1	140	0.027	0.5xd1	140	0.027	0.5xd1	140	0.028	0.5xd1
	100	0.012	0.5xd1	120	0.017	0.5xd1	120	0.027	0.5xd1	140	0.027	0.5xd1	140	0.027	0.5xd1	140	0.028	0.5xd1
	80	0.006	0.5xd1	100	0.007	0.5xd1	100	0.010	0.5xd1	120	0.013	0.5xd1	120	0.013	0.5xd1	120	0.013	0.5xd1

NEW


Type A - Side milling - Semi-finishing

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Semi-finishing



- $a_p = 1 \times d_1 - 2 \times d_1$
- $a_e = 0.2 \times d_1$



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm	
					v_c	f_z
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	140	0.013
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310	140	0.012
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2	140	0.009
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	140	0.014
		1.4105	X6CrMoS17	AISI 430F		
		1.4034	X46Cr13	AISI 420C		
	Stainless steel martensitic	1.4112	X90CrMoV18	AISI 440B	140	0.013
		1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
	Stainless steel martensitic – PH	1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH	140	0.013
		1.4301	X5CrNi18-10	AISI 304		
	Stainless steel austenitic	1.4435	X2CrNiMo18-14-3	AISI 316L	140	0.010
		1.4441	X2CrNiMo18-15-3	AISI 316LM		
1.4539		X1NiCrMoCu25-20-5	AISI 904L			
K	Cast iron	0.6020	GG20	ASTM 30	120	0.009
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
		0.7060	GGG60	ASTM 80-60-03		
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	140	0.015
		3.4365	AlZnMgCu1.5	ASTM 7075		
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	140	0.015
		3.2381	GD-AlSi10Mg	UNS A03590		
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	140	0.017
		2.0065	Cu-ETP / CW004A	UNS C11000		
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	140	0.017
		2.0360	CuZn40 CW509L	UNS C28000		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0401	CuZn39Pb3 / CW614N	UNS C38500	140	0.017
		2.1020	CuSn6	UNS C51900		
Bronze $R_m < 600 \text{ N/mm}^2$	2.0966	CuAl10Ni5Fe4	UNS C63000	140	0.015	
	2.0960	CuAl9Mn2	UNS C63200			
S₁	Super alloys	2.4856		Inconel 625	80	0.006
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	120	0.014
		3.7065	Gr.4	ASTM B348 / F68		
S₂	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	120	0.014
		9.9367	TiAl6Nb7	ASTM F1295		
S₃	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	80	0.006
			CrCoMo28	ASTM F1537		
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended




	1.5 mm 1/16"		2.0 mm 3/32"		3.0 mm 1/8"		Ød ₁ 4.0 mm 5/32"		5.0 mm 3/16" - 7/32"		6.0 mm 1/4"		8.0 mm	
	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z
	200	0.020	220	0.029	240	0.037	260	0.040	260	0.040	260	0.043	260	0.051
	200	0.019	220	0.027	240	0.035	260	0.038	260	0.038	260	0.041	260	0.049
	200	0.017	220	0.026	240	0.032	260	0.034	260	0.034	260	0.036	260	0.043
	200	0.020	220	0.029	240	0.035	260	0.038	260	0.038	260	0.041	260	0.046
	200	0.019	220	0.027	240	0.035	260	0.037	260	0.037	260	0.039	260	0.045
	200	0.019	220	0.027	240	0.035	260	0.037	260	0.037	260	0.039	260	0.045
	200	0.014	220	0.026	240	0.032	260	0.035	260	0.035	260	0.037	260	0.043
	140	0.020	160	0.024	180	0.034	200	0.040	200	0.042	200	0.044	200	0.052
	200	0.022	220	0.031	240	0.046	260	0.048	260	0.048	260	0.051	260	0.063
	200	0.022	220	0.031	240	0.046	260	0.048	260	0.048	260	0.051	260	0.063
	200	0.022	220	0.031	240	0.046	260	0.048	260	0.048	260	0.051	260	0.063
	200	0.022	220	0.031	240	0.046	260	0.048	260	0.048	260	0.051	260	0.063
	200	0.022	220	0.031	240	0.046	260	0.048	260	0.048	260	0.051	260	0.063
	200	0.022	220	0.031	240	0.046	260	0.048	260	0.048	260	0.051	260	0.063
	100	0.008	100	0.009	100	0.012	120	0.016	120	0.016	120	0.017	120	0.018
	120	0.017	130	0.024	130	0.032	150	0.035	150	0.035	150	0.037	150	0.040
	120	0.017	130	0.024	130	0.032	150	0.035	150	0.035	150	0.037	150	0.040
	100	0.008	100	0.009	100	0.012	120	0.016	120	0.016	120	0.017	120	0.018

NEW


Type A - Side milling - Finishing

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Finishing



- $a_p = 2.5 \times d_1$
- $a_e = 0.05 - 0.10 \times d_1$



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm	
					v_c	f_z
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	130	0.008
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310	130	0.007
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2	130	0.006
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	130	0.008
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C	130	0.008
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH	130	0.008
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304	130	0.006
		1.4435	X2CrNiMo18-14-3	AISI 316L		
1.4441		X2CrNiMo18-15-3	AISI 316LM			
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
K	Cast iron	0.6020	GG20	ASTM 30	110	0.006
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
		0.7060	GGG60	ASTM 80-60-03		
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	130	0.009
		3.4365	AlZnMgCu1.5	ASTM 7075		
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	130	0.009
		3.2381	GD-AlSi10Mg	UNS A03590		
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	130	0.010
		2.0065	Cu-ETP / CW004A	UNS C11000		
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	130	0.010
		2.0360	CuZn40 CW509L	UNS C28000		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0401	CuZn39Pb3 / CW614N	UNS C38500	130	0.010
		2.1020	CuSn6	UNS C51900		
Bronze $R_m < 600 \text{ N/mm}^2$	2.0966	CuAl10Ni5Fe4	UNS C63000	130	0.009	
	2.0960	CuAl9Mn2	UNS C63200			
S ₁	Super alloys	2.4856		Inconel 625	110	0.004
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S ₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	110	0.008
		3.7065	Gr.4	ASTM B348 / F68		
S ₂	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	110	0.008
		9.9367	TiAl6Nb7	ASTM F1295		
S ₃	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	110	0.004
			CrCoMo28	ASTM F1537		
H ₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H ₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ☒ Not recommended




	1.5 mm 1/16"		2.0 mm 3/32"		3.0 mm 1/8"		$\varnothing d_1$ 4.0 mm 5/32"		5.0 mm 3/16" - 7/32"		6.0 mm 1/4"		8.0 mm	
	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z
	180	0.012	200	0.017	210	0.023	220	0.025	220	0.028	220	0.033	220	0.042
	180	0.011	200	0.016	210	0.022	220	0.024	220	0.026	220	0.029	220	0.038
	180	0.010	200	0.015	210	0.020	220	0.021	220	0.023	220	0.025	220	0.034
	180	0.012	200	0.017	210	0.022	220	0.024	220	0.026	220	0.029	220	0.036
	180	0.011	200	0.016	210	0.022	220	0.023	220	0.025	220	0.028	220	0.037
	180	0.011	200	0.016	210	0.022	220	0.023	220	0.025	220	0.028	220	0.037
	180	0.008	200	0.015	210	0.020	220	0.022	220	0.024	220	0.026	220	0.035
	130	0.012	150	0.014	160	0.022	170	0.025	170	0.029	170	0.031	200	0.040
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	270	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	270	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	270	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	270	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	270	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	270	0.045
	120	0.005	130	0.005	130	0.008	140	0.010	140	0.011	150	0.012	160	0.021
	120	0.010	130	0.014	130	0.020	140	0.022	140	0.024	150	0.026	160	0.035
	120	0.010	130	0.014	130	0.020	140	0.022	140	0.024	150	0.026	160	0.035
	120	0.005	130	0.005	130	0.008	140	0.010	140	0.011	150	0.012	160	0.021

NEW

Type C - 5 x d - Corner radius - Z3

MILLING WITH INTEGRATED COOLING

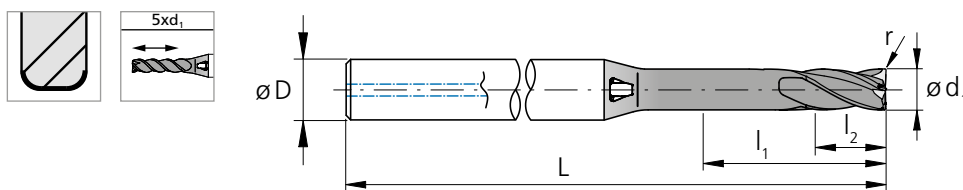






P&S - Corner radius



l_1 = Effective length
 l_2 = Cutting length

d_1	d_1	l_1	l_2	D	L	r	r	Item number	Availability
[mm]	[inch]	[mm]	[mm]	(h6) [mm]	[mm]	[mm]	[inch]		
1.0		5.00	2.00	4	40	0.10		2.CMC42.C2Z3.100.1	■
1.0		5.00	2.00	4	40	0.20		2.CMC42.C3Z3.100.1	■
1.1		5.50	2.20	4	40	0.10		2.CMC42.C2Z3.110.1	■
1.1		5.50	2.20	4	40	0.20		2.CMC42.C3Z3.110.1	■
1.2		6.00	2.40	4	40	0.10		2.CMC42.C2Z3.120.1	■
1.2		6.00	2.40	4	40	0.20		2.CMC42.C3Z3.120.1	■
1.3		6.50	2.60	4	40	0.10		2.CMC42.C2Z3.130.1	■
1.3		6.50	2.60	4	40	0.20		2.CMC42.C3Z3.130.1	■
1.4		7.00	2.80	4	40	0.10		2.CMC42.C2Z3.140.1	■
1.4		7.00	2.80	4	40	0.20		2.CMC42.C3Z3.140.1	■
1.5		7.50	3.00	4	40	0.10		2.CMC42.C2Z3.150.1	■
1.5		7.50	3.00	4	40	0.30		2.CMC42.C3Z3.150.1	■
1.587	1/16	7.94	3.17	4	45	0.127	.005	2.CMC.PSRC2Z3.F116	■
1.587	1/16	7.94	3.17	4	45	0.254	.010	2.CMC.PSRC3Z3.F116	■
1.6		8.00	3.20	4	45	0.10		2.CMC42.C2Z3.160.1	■
1.6		8.00	3.20	4	45	0.30		2.CMC42.C3Z3.160.1	■
1.7		8.50	3.40	4	45	0.10		2.CMC42.C2Z3.170.1	■
1.7		8.50	3.40	4	45	0.30		2.CMC42.C3Z3.170.1	■
1.8		9.00	3.60	4	45	0.10		2.CMC42.C2Z3.180.1	■
1.8		9.00	3.60	4	45	0.30		2.CMC42.C3Z3.180.1	■
1.9		9.50	3.80	4	44	0.10		2.CMC42.C2Z3.190.1	■
1.9		9.50	3.80	4	44	0.30		2.CMC42.C3Z3.190.1	■
2.0		10.00	4.00	4	44	0.10		2.CMC42.C2Z3.200.1	■
2.0		10.00	4.00	4	44	0.20		2.CMC42.C3Z3.200.1	■
2.0		10.00	4.00	4	44	0.50		2.CMC42.C4Z3.200.1	■
2.1		10.50	4.20	4	44	0.20		2.CMC42.C2Z3.210.1	■
2.1		10.50	4.20	4	44	0.50		2.CMC42.C3Z3.210.1	■
2.2		11.00	4.40	4	44	0.20		2.CMC42.C2Z3.220.1	■
2.2		11.00	4.40	4	44	0.50		2.CMC42.C3Z3.220.1	■
2.3		11.50	4.60	4	44	0.20		2.CMC42.C2Z3.230.1	■
2.3		11.50	4.60	4	44	0.50		2.CMC42.C3Z3.230.1	■
2.381	3/32	11.91	4.76	4	44	0.127	.005	2.CMC.PSRC2Z3.F332	■
2.381	3/32	11.91	4.76	4	44	0.254	.010	2.CMC.PSRC3Z3.F332	■
2.381	3/32	11.91	4.76	4	44	0.381	.015	2.CMC.PSRC4Z3.F332	■
2.4		12.00	4.80	4	44	0.20		2.CMC42.C2Z3.240.1	■
2.4		12.00	4.80	4	44	0.50		2.CMC42.C3Z3.240.1	■
2.5		12.50	5.00	6	55	0.20		2.CMC42.C2Z3.250.1	■
2.5		12.50	5.00	6	55	0.50		2.CMC42.C3Z3.250.1	■
2.6		13.00	5.20	6	55	0.20		2.CMC42.C2Z3.260.1	■
2.6		13.00	5.20	6	55	0.50		2.CMC42.C3Z3.260.1	■
2.7		13.50	5.40	6	55	0.20		2.CMC42.C2Z3.270.1	■
2.7		13.50	5.40	6	55	0.50		2.CMC42.C3Z3.270.1	■

■ Stock item

Carbide	Z3							
		$\varnothing d_1$	1.0 - 3.0 mm	3.1 - 6.0 mm	6.1 - 8.0 mm	r	0.1 - 1.524 mm	
		Tolerance	- 0.014 mm - 0.028 mm	- 0.020 mm - 0.038 mm	- 0.025 mm - 0.047 mm	Tolerance	$\pm 0.05 \cdot r$ mm	

d_1	d_1	l_1	l_2	D (h6)	L	r	r	Item number	Availability
[mm]	[inch]	[mm]	[mm]	[mm]	[mm]	[mm]	[inch]		
2.8		14.00	5.60	6	55	0.20		2.CMC42.C2Z3.280.1	■
2.8		14.00	5.60	6	55	0.50		2.CMC42.C3Z3.280.1	■
2.9		14.50	5.80	6	55	0.20		2.CMC42.C2Z3.290.1	■
2.9		14.50	5.80	6	55	0.50		2.CMC42.C3Z3.290.1	■
3.0		15.00	6.00	6	55	0.20		2.CMC42.C2Z3.300.1	■
3.0		15.00	6.00	6	55	0.50		2.CMC42.C3Z3.300.1	■
3.1		15.50	6.20	6	60	0.20		2.CMC42.C2Z3.310.1	■
3.1		15.50	6.20	6	60	0.50		2.CMC42.C3Z3.310.1	■
3.175	1/8	15.88	6.35	6	60	0.254	.010	2.CMC.PSRC2Z3.F18	■
3.175	1/8	15.88	6.35	6	60	0.381	.015	2.CMC.PSRC3Z3.F18	■
3.3		16.50	6.60	6	60	0.20		2.CMC42.C2Z3.330.1	■
3.3		16.50	6.60	6	60	0.50		2.CMC42.C3Z3.330.1	■
3.7		18.50	7.40	6	60	0.20		2.CMC42.C2Z3.370.1	■
3.7		18.50	7.40	6	60	0.50		2.CMC42.C3Z3.370.1	■
3.968	5/32	19.84	7.94	6	60	0.254	.010	2.CMC.PSRC2Z3.F532	■
3.968	5/32	19.84	7.94	6	60	0.381	.015	2.CMC.PSRC3Z3.F532	■
4.0		20.00	8.00	6	60	0.20		2.CMC42.C2Z3.400.1	■
4.0		20.00	8.00	6	60	0.50		2.CMC42.C3Z3.400.1	■
4.3		21.50	8.60	8	70	0.20		2.CMC42.C2Z3.430.1	■
4.3		21.50	8.60	8	70	0.50		2.CMC42.C3Z3.430.1	■
4.7		23.50	9.40	8	70	0.20		2.CMC42.C2Z3.470.1	■
4.7		23.50	9.40	8	70	0.50		2.CMC42.C3Z3.470.1	■
4.762	3/16	23.81	9.52	8	70	0.254	.010	2.CMC.PSRC2Z3.F316	■
4.762	3/16	23.81	9.52	8	70	0.381	.015	2.CMC.PSRC3Z3.F316	■
4.8		24.00	9.60	8	70	0.20		2.CMC42.C2Z3.480.1	■
4.8		24.00	9.60	8	70	0.50		2.CMC42.C3Z3.480.1	■
5.0		25.00	10.00	8	70	0.20		2.CMC42.C2Z3.500.1	■
5.0		25.00	10.00	8	70	0.50		2.CMC42.C3Z3.500.1	■
5.3		26.50	10.60	10	70	0.20		2.CMC42.C2Z3.530.1	■
5.3		26.50	10.60	10	70	0.50		2.CMC42.C3Z3.530.1	■
5.560	7/32	27.80	11.12	10	70	0.381	.015	2.CMC.PSRC2Z3.F732	■
5.560	7/32	27.80	11.12	10	70	0.762	.030	2.CMC.PSRC3Z3.F732	■
5.7		28.50	11.40	10	70	0.20		2.CMC42.C2Z3.570.1	■
5.7		28.50	11.40	10	70	0.50		2.CMC42.C3Z3.570.1	■
6.0		30.00	12.00	10	70	0.20		2.CMC42.C2Z3.600.1	■
6.0		30.00	12.00	10	70	0.50		2.CMC42.C3Z3.600.1	■
6.0		30.00	12.00	10	70	1.00		2.CMC42.C4Z3.600.1	■
6.350	1/4	31.75	12.70	10	70	0.381	.015	2.CMC.PSRC2Z3.F14	■
6.350	1/4	31.75	12.70	10	70	0.762	.030	2.CMC.PSRC3Z3.F14	■
6.350	1/4	31.75	12.70	10	70	1.524	.060	2.CMC.PSRC4Z3.F14	■
8.0		40.00	16.00	12	90	0.20		2.CMC42.C2Z3.800.1	■
8.0		40.00	16.00	12	90	0.50		2.CMC42.C3Z3.800.1	■
8.0		40.00	16.00	12	90	1.50		2.CMC42.C4Z3.800.1	■

■ Stock item


NEW

Type C - Plunge - Slot milling

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW


Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm			
					v_c	$f_{z,p}$	$f_{z,s}$	a_p
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	100	0.0013	0.0046	0.5xd1
		1.0401	C15	AISI 1015				
		1.1191	C45E/CK45	AISI 1045				
		1.0044	S275JR	AISI 1020				
		1.0715	11SMn30	AISI 1215				
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310	100	0.0014	0.0049	0.5xd1
		1.7131	16MnCr5	AISI 5115				
		1.3505	100Cr6	AISI 52100				
		1.7225	42CrMo4	AISI 4140				
		1.2842	90MnCrV8	AISI O2				
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2	100	0.0012	0.0042	0.25xd1
		1.2436	X210CrW12	AISI D4/D6				
		1.3343	HS6-5-2C	AISI M2 / UNS T11302				
		1.3355	HS18-0-1	AISI T1 / UNS T12001				
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	100	0.0010	0.0035	0.5xd1
		1.4105	X6CrMoS17	AISI 430F				
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C	100	0.0010	0.0035	0.25xd1
		1.4112	X90CrMoV18	AISI 440B				
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH	100	0.0010	0.0035	0.25xd1
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH				
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304	100	0.0010	0.0035	0.5xd1
		1.4435	X2CrNiMo18-14-3	AISI 316L				
		1.4441	X2CrNiMo18-15-3	AISI 316LM				
	1.4539	X1NiCrMoCu25-20-5	AISI 904L					
K	Cast iron	0.6020	GG20	ASTM 30	100	0.0013	0.0042	0.5xd1
		0.6030	GG30	ASTM 40B				
		0.7040	GGG40	ASTM 60-40-18				
		0.7060	GGG60	ASTM 80-60-03				
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	100	0.0012	0.0100	0.5xd1
		3.4365	AlZnMgCu1.5	ASTM 7075				
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	100	0.0012	0.0100	0.5xd1
		3.2381	GD-AlSi10Mg	UNS A03590				
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	100	0.0012	0.0100	0.5xd1
		2.0065	Cu-ETP / CW004A	UNS C11000				
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	100	0.0012	0.0100	0.5xd1
		2.0360	CuZn40 CW509L	UNS C28000				
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0401	CuZn39Pb3 / CW614N	UNS C38500	100	0.0012	0.0100	0.5xd1
		2.1020	CuSn6	UNS C51900				
Bronze $R_m < 600 \text{ N/mm}^2$	2.0966	CuAl10Ni5Fe4	UNS C63000	100	0.0012	0.0100	0.5xd1	
	2.0960	CuAl9Mn2	UNS C63200					
S₁	Super alloys	2.4856		Inconel 625	40	0.0010	0.0035	0.25xd1
		2.4668		Inconel 718				
		2.4617	NiMo28	Hastelloy B-2				
		2.4665	NiCr22Fe18Mo	Hastelloy X				
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	80	0.0010	0.0032	0.25xd1
		3.7065	Gr.4	ASTM B348 / F68				
S₃	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	80	0.0010	0.0032	0.25xd1
		9.9367	TiAl6Nb7	ASTM F1295				
S₃	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	60	0.0010	0.0035	0.25xd1
			CrCoMo28	ASTM F1537				
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1				
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2				

Plunge milling





■ $f_{z,p}$: for plunge milling

Slot milling



■ $f_{z,p}$: for plunge milling

■ $f_{z,s}$: for slot milling



v_c [m/min] a_p [mm]
 $f_{z,p}$ [mm] $f_{z,s}$ [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ☒ Not recommended


P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂

$\varnothing d_1$																							
1.5 mm 1/16"				2.0 mm 3/32"				3.0 mm 1/8"				4.0 mm 5/32"				5.0 mm 3/16" - 7/32"				6.0 mm - 8.0 mm 1/4"			
v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p	v_c	$f_{z,p}$	$f_{z,s}$	a_p
120	0.0020	0.0065	0.5xd1	120	0.0026	0.0091	0.5xd1	140	0.004	0.013	0.5xd1	140	0.005	0.020	0.5xd1	150	0.005	0.026	0.5xd1	160	0.006	0.033	0.5xd1
120	0.0021	0.0070	0.5xd1	120	0.0028	0.0098	0.5xd1	140	0.004	0.014	0.5xd1	140	0.005	0.021	0.5xd1	150	0.006	0.027	0.5xd1	160	0.006	0.034	0.5xd1
120	0.0018	0.0060	0.25xd1	120	0.0024	0.0084	0.25xd1	140	0.003	0.012	0.25xd1	140	0.004	0.017	0.25xd1	150	0.004	0.022	0.25xd1	160	0.005	0.028	0.25xd1
120	0.0015	0.0050	0.5xd1	120	0.0020	0.0070	0.5xd1	140	0.003	0.010	0.5xd1	140	0.004	0.015	0.5xd1	150	0.004	0.020	0.5xd1	160	0.005	0.025	0.5xd1
120	0.0015	0.0050	0.25xd1	120	0.0020	0.0070	0.25xd1	140	0.003	0.010	0.25xd1	140	0.004	0.015	0.25xd1	150	0.004	0.020	0.25xd1	160	0.005	0.025	0.25xd1
120	0.0015	0.0050	0.25xd1	120	0.0020	0.0070	0.25xd1	140	0.003	0.010	0.25xd1	140	0.004	0.015	0.25xd1	150	0.004	0.020	0.25xd1	160	0.005	0.025	0.25xd1
120	0.0015	0.0050	0.5xd1	120	0.0020	0.0070	0.5xd1	140	0.003	0.010	0.5xd1	140	0.004	0.015	0.5xd1	150	0.004	0.020	0.5xd1	160	0.005	0.020	0.5xd1
120	0.0019	0.0060	0.5xd1	120	0.0024	0.0084	0.5xd1	140	0.004	0.012	0.5xd1	140	0.004	0.017	0.5xd1	150	0.005	0.022	0.5xd1	160	0.005	0.028	0.5xd1
120	0.0018	0.0160	0.5xd1	120	0.0024	0.0210	0.5xd1	150	0.004	0.034	0.5xd1	160	0.004	0.035	0.5xd1	170	0.005	0.036	0.5xd1	180	0.005	0.037	0.5xd1
120	0.0018	0.0160	0.5xd1	120	0.0024	0.0210	0.5xd1	150	0.004	0.034	0.5xd1	160	0.004	0.035	0.5xd1	170	0.005	0.036	0.5xd1	180	0.005	0.037	0.5xd1
120	0.0018	0.0160	0.5xd1	120	0.0024	0.0210	0.5xd1	150	0.004	0.034	0.5xd1	160	0.004	0.035	0.5xd1	170	0.005	0.036	0.5xd1	180	0.005	0.037	0.5xd1
120	0.0018	0.0160	0.5xd1	120	0.0024	0.0210	0.5xd1	150	0.004	0.034	0.5xd1	160	0.004	0.035	0.5xd1	170	0.005	0.036	0.5xd1	180	0.005	0.037	0.5xd1
120	0.0018	0.0160	0.5xd1	120	0.0024	0.0210	0.5xd1	150	0.004	0.034	0.5xd1	160	0.004	0.035	0.5xd1	170	0.005	0.036	0.5xd1	180	0.005	0.037	0.5xd1
120	0.0018	0.0160	0.5xd1	120	0.0024	0.0210	0.5xd1	150	0.004	0.034	0.5xd1	160	0.004	0.035	0.5xd1	170	0.005	0.036	0.5xd1	180	0.005	0.037	0.5xd1
40	0.0015	0.0050	0.25xd1	50	0.0020	0.0070	0.25xd1	50	0.003	0.010	0.25xd1	60	0.004	0.014	0.25xd1	80	0.004	0.018	0.25xd1	80	0.005	0.021	0.25xd1
90	0.0014	0.0045	0.25xd1	100	0.0018	0.0063	0.25xd1	110	0.003	0.010	0.25xd1	120	0.004	0.013	0.25xd1	120	0.004	0.016	0.25xd1	120	0.005	0.019	0.25xd1
90	0.0014	0.0045	0.25xd1	100	0.0018	0.0063	0.25xd1	110	0.003	0.010	0.25xd1	120	0.004	0.013	0.25xd1	120	0.004	0.016	0.25xd1	120	0.005	0.019	0.25xd1
60	0.0015	0.0050	0.25xd1	80	0.0020	0.0070	0.25xd1	80	0.003	0.010	0.25xd1	100	0.004	0.014	0.25xd1	100	0.004	0.018	0.25xd1	120	0.005	0.021	0.25xd1

NEW

Type C - Milling of through slots

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

	Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm		
						v_c	f_z	a_p
<p>Through slot milling</p>    	P	Unalloyed carbon steel Rm < 800 N/mm ²	1.0301	C10	AISI 1010	120	0.009	0.5xd1
			1.0401	C15	AISI 1015			
			1.1191	C45E/CK45	AISI 1045			
			1.0044	S275JR	AISI 1020			
			1.0715	11SMn30	AISI 1215			
		Low alloyed steel Rm > 900 N/mm ²	1.5752	15NiCr13	ASTM 3415 / AISI 3310	120	0.008	0.5xd1
			1.7131	16MnCr5	AISI 5115			
			1.3505	100Cr6	AISI 52100			
			1.7225	42CrMo4	AISI 4140			
			1.2842	90MnCrV8	AISI O2			
		High alloyed tool steel Rm < 1200 N/mm ²	1.2379	X153CrMoV12	AISI D2	120	0.006	0.25xd1
			1.2436	X210CrW12	AISI D4/D6			
			1.3343	HS6-5-2C	AISI M2 / UNS T11302			
			1.3355	HS18-0-1	AISI T1 / UNS T12001			
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	120	0.009	0.5xd1	
		1.4105	X6CrMoS17	AISI 430F				
		1.4034	X46Cr13	AISI 420C				
	Stainless steel martensitic	1.4112	X90CrMoV18	AISI 440B	120	0.009	0.5xd1	
		1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH				
	Stainless steel martensitic – PH	1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH	120	0.009	0.5xd1	
		1.4301	X5CrNi18-10	AISI 304				
		1.4435	X2CrNiMo18-14-3	AISI 316L				
Stainless steel austenitic	1.4441	X2CrNiMo18-15-3	AISI 316LM	120	0.007	0.5xd1		
	1.4539	X1NiCrMoCu25-20-5	AISI 904L					
K	Cast iron	0.6020	GG20	ASTM 30	100	0.007	0.5xd1	
		0.6030	GG30	ASTM 40B				
		0.7040	GGG40	ASTM 60-40-18				
		0.7060	GGG60	ASTM 80-60-03				
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	170	0.010	0.5xd1	
		3.4365	AlZnMgCu1.5	ASTM 7075				
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	170	0.010	0.5xd1	
		3.2381	GD-AlSi10Mg	UNS A03590				
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	170	0.012	0.5xd1	
		2.0065	Cu-ETP / CW004A	UNS C11000				
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	170	0.012	0.5xd1	
		2.0360	CuZn40 CW509L	UNS C28000				
	Brass, Bronze Rm < 400 N/mm ²	2.0401	CuZn39Pb3 / CW614N	UNS C38500	170	0.012	0.5xd1	
		2.1020	CuSn6	UNS C51900				
Bronze Rm < 600 N/mm ²	2.0966	CuAl10Ni5Fe4	UNS C63000	170	0.011	0.5xd1		
	2.0960	CuAl9Mn2	UNS C63200					
S₁	Super alloys	2.4856		Inconel 625	80	0.005	0.25xd1	
		2.4668		Inconel 718				
		2.4617	NiMo28	Hastelloy B-2				
		2.4665	NiCr22Fe18Mo	Hastelloy X				
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	80	0.009	0.25xd1	
		3.7065	Gr.4	ASTM B348 / F68				
S₃	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	80	0.009	0.25xd1	
		9.9367	TiAl6Nb7	ASTM F1295				
S₃	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	80	0.005	0.25xd1	
			CrCoMo28	ASTM F1537				
H₁	Hardened steel < 55 HRC	1.2510	100MnCrMoW4	AISI O1				
H₂	Hardened steel ≥ 55 HRC	1.2379	X153CrMoV12	AISI D2				

v_c [m/min]
 f_z [mm]
 a_p [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ☒ Not recommended



	1.5 mm 1/16"			2.0 mm 3/32"			3.0 mm 1/8"			4.0 mm 5/32"			5.0 mm 3/16" - 7/32"			6.0 mm - 8.0 mm 1/4"		
	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p	v_c	f_z	a_p
	140	0.015	0.5xd1	160	0.020	0.5xd1	180	0.029	0.5xd1	200	0.031	0.5xd1	200	0.031	0.5xd1	220	0.032	0.5xd1
	140	0.013	0.5xd1	160	0.019	0.5xd1	180	0.028	0.5xd1	200	0.029	0.5xd1	200	0.030	0.5xd1	220	0.031	0.5xd1
	140	0.012	0.25xd1	160	0.017	0.25xd1	180	0.025	0.25xd1	200	0.026	0.25xd1	200	0.026	0.25xd1	220	0.027	0.25xd1
	140	0.015	0.5xd1	160	0.020	0.5xd1	180	0.028	0.5xd1	200	0.029	0.5xd1	200	0.030	0.5xd1	220	0.031	0.5xd1
	140	0.013	0.5xd1	160	0.019	0.5xd1	180	0.027	0.5xd1	200	0.028	0.5xd1	200	0.029	0.5xd1	220	0.029	0.5xd1
	140	0.013	0.5xd1	160	0.019	0.5xd1	180	0.027	0.5xd1	200	0.028	0.5xd1	200	0.029	0.5xd1	220	0.029	0.5xd1
	140	0.011	0.5xd1	160	0.017	0.5xd1	180	0.025	0.5xd1	200	0.027	0.5xd1	200	0.027	0.5xd1	220	0.028	0.5xd1
	120	0.015	0.5xd1	140	0.017	0.5xd1	160	0.025	0.5xd1	180	0.031	0.5xd1	200	0.031	0.5xd1	200	0.032	0.5xd1
	190	0.016	0.5xd1	210	0.021	0.5xd1	230	0.034	0.5xd1	250	0.035	0.5xd1	250	0.036	0.5xd1	270	0.037	0.5xd1
	190	0.016	0.5xd1	210	0.021	0.5xd1	230	0.032	0.5xd1	250	0.034	0.5xd1	250	0.034	0.5xd1	270	0.036	0.5xd1
	190	0.016	0.5xd1	210	0.021	0.5xd1	230	0.034	0.5xd1	250	0.035	0.5xd1	250	0.036	0.5xd1	270	0.037	0.5xd1
	190	0.016	0.5xd1	210	0.021	0.5xd1	230	0.034	0.5xd1	250	0.035	0.5xd1	250	0.036	0.5xd1	270	0.037	0.5xd1
	190	0.016	0.5xd1	210	0.021	0.5xd1	230	0.034	0.5xd1	250	0.035	0.5xd1	250	0.036	0.5xd1	270	0.037	0.5xd1
	190	0.016	0.5xd1	210	0.021	0.5xd1	230	0.034	0.5xd1	250	0.035	0.5xd1	250	0.036	0.5xd1	270	0.037	0.5xd1
	80	0.006	0.25xd1	100	0.007	0.25xd1	100	0.010	0.25xd1	120	0.013	0.25xd1	120	0.013	0.25xd1	120	0.013	0.25xd1
	80	0.012	0.25xd1	100	0.017	0.25xd1	100	0.027	0.25xd1	120	0.027	0.25xd1	120	0.027	0.25xd1	140	0.028	0.25xd1
	80	0.012	0.25xd1	100	0.017	0.25xd1	100	0.027	0.25xd1	120	0.027	0.25xd1	120	0.027	0.25xd1	140	0.028	0.25xd1
	80	0.006	0.25xd1	100	0.007	0.25xd1	100	0.010	0.25xd1	120	0.013	0.25xd1	120	0.013	0.25xd1	120	0.013	0.25xd1


NEW

Type C - Side milling - Semi-finishing


MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm	
					v_c	f_z
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	120	0.017
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310	120	0.016
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2	120	0.012
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	120	0.018
		1.4105	X6CrMoS17	AISI 430F		
		1.4034	X46Cr13	AISI 420C		
	Stainless steel martensitic	1.4112	X90CrMoV18	AISI 440B	120	0.017
		1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
	Stainless steel martensitic – PH	1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH	120	0.017
		1.4301	X5CrNi18-10	AISI 304		
	Stainless steel austenitic	1.4435	X2CrNiMo18-14-3	AISI 316L	120	0.013
		1.4441	X2CrNiMo18-15-3	AISI 316LM		
1.4539		X1NiCrMoCu25-20-5	AISI 904L			
K	Cast iron	0.6020	GG20	ASTM 30	100	0.012
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
		0.7060	GGG60	ASTM 80-60-03		
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	170	0.020
		3.4365	AlZnMgCu1.5	ASTM 7075		
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	170	0.020
		3.2381	GD-AlSi10Mg	UNS A03590		
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	170	0.022
		2.0065	Cu-ETP / CW004A	UNS C11000		
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	170	0.022
		2.0360	CuZn40 CW509L	UNS C28000		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0401	CuZn39Pb3 / CW614N	UNS C38500	170	0.022
		2.1020	CuSn6	UNS C51900		
Bronze $R_m < 600 \text{ N/mm}^2$	2.0966	CuAl10Ni5Fe4	UNS C63000	170	0.020	
	2.0960	CuAl9Mn2	UNS C63200			
S₁	Super alloys	2.4856		Inconel 625	100	0.008
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	100	0.018
		3.7065	Gr.4	ASTM B348 / F68		
S₂	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	100	0.018
		9.9367	TiAl6Nb7	ASTM F1295		
S₃	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	100	0.008
			CrCoMo28	ASTM F1537		
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

Semi-finishing



- $a_p = 1 \times d_1 - 2 \times d_1$
- $a_e = 0.1 \times d_1$



v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended



	1.5 mm 1/16"		2.0 mm 3/32"		3.0 mm 1/8"		$\varnothing d_1$ 4.0 mm 5/32"		5.0 mm 3/16" - 7/32"		6.0 mm 1/4"		8.0 mm	
	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z
	140	0.026	160	0.038	180	0.048	200	0.050	200	0.052	220	0.056	220	0.068
	140	0.025	160	0.036	180	0.044	200	0.048	200	0.050	220	0.054	220	0.066
	140	0.022	160	0.035	180	0.042	200	0.043	200	0.045	220	0.048	220	0.058
	140	0.026	160	0.038	180	0.046	200	0.048	200	0.050	220	0.055	220	0.062
	140	0.025	160	0.036	180	0.044	200	0.046	200	0.048	220	0.052	220	0.060
	140	0.025	160	0.036	180	0.044	200	0.046	200	0.048	220	0.052	220	0.060
	140	0.016	160	0.034	180	0.042	200	0.044	200	0.046	220	0.049	220	0.058
	120	0.026	140	0.032	160	0.043	180	0.054	180	0.056	200	0.058	200	0.070
	190	0.029	210	0.040	230	0.060	250	0.062	250	0.064	270	0.068	270	0.084
	190	0.029	210	0.040	230	0.060	250	0.062	250	0.064	270	0.068	270	0.084
	190	0.029	210	0.040	230	0.060	250	0.062	250	0.064	270	0.068	270	0.084
	190	0.029	210	0.040	230	0.060	250	0.062	250	0.064	270	0.068	270	0.084
	190	0.029	210	0.040	230	0.060	250	0.062	250	0.064	270	0.068	270	0.084
	190	0.029	210	0.040	230	0.060	250	0.062	250	0.064	270	0.068	270	0.084
	100	0.010	120	0.012	120	0.016	140	0.018	140	0.020	160	0.022	160	0.024
	100	0.022	120	0.032	120	0.042	140	0.044	140	0.046	160	0.048	160	0.054
	100	0.022	120	0.032	120	0.042	140	0.044	140	0.046	160	0.048	160	0.054
	100	0.010	120	0.012	120	0.016	140	0.018	140	0.020	160	0.022	160	0.024


NEW

Type C - Side milling - Finishing


MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	1.0 mm	
					v_c	f_z
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	130	0.008
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310	130	0.007
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2	130	0.006
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	130	0.008
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C	130	0.008
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH	130	0.008
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304	130	0.006
		1.4435	X2CrNiMo18-14-3	AISI 316L		
1.4441		X2CrNiMo18-15-3	AISI 316LM			
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
K	Cast iron	0.6020	GG20	ASTM 30	110	0.006
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
		0.7060	GGG60	ASTM 80-60-03		
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	130	0.009
		3.4365	AlZnMgCu1.5	ASTM 7075		
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	130	0.009
		3.2381	GD-AlSi10Mg	UNS A03590		
	Copper	2.0040	Cu-OF / CW008A	UNS C10100	130	0.010
		2.0065	Cu-ETP / CW004A	UNS C11000		
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	130	0.010
		2.0360	CuZn40 CW509L	UNS C28000		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0401	CuZn39Pb3 / CW614N	UNS C38500	130	0.010
		2.1020	CuSn6	UNS C51900		
Bronze $R_m < 600 \text{ N/mm}^2$	2.0966	CuAl10Ni5Fe4	UNS C63000	130	0.009	
	2.0960	CuAl9Mn2	UNS C63200			
S₁	Super alloys	2.4856		Inconel 625	110	0.004
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	110	0.008
		3.7065	Gr.4	ASTM B348 / F68		
S₃	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	110	0.008
		9.9367	TiAl6Nb7	ASTM F1295		
S₃	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	110	0.004
			CrCoMo28	ASTM F1537		
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

Finishing



- $a_p = 2 \times d_1$
- $a_e = 0.02 - 0.05 \times d_1$



v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ☒ Not recommended



	1.5 mm 1/16"		2.0 mm 3/32"		3.0 mm 1/8"		Ød ₁ 4.0 mm 5/32"		5.0 mm 3/16" - 7/32"		6.0 mm 1/4"		8.0 mm	
	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z
	180	0.012	200	0.017	210	0.023	220	0.025	220	0.028	220	0.033	220	0.042
	180	0.011	200	0.016	210	0.022	220	0.024	220	0.026	220	0.029	220	0.038
	180	0.010	200	0.015	210	0.020	220	0.021	220	0.023	220	0.025	220	0.034
	180	0.012	200	0.017	210	0.022	220	0.024	220	0.026	220	0.029	220	0.036
	180	0.011	200	0.016	210	0.022	220	0.023	220	0.025	220	0.028	220	0.037
	180	0.011	200	0.016	210	0.022	220	0.023	220	0.025	220	0.028	220	0.037
	180	0.008	200	0.015	210	0.020	220	0.022	220	0.024	220	0.026	220	0.035
	130	0.012	150	0.014	160	0.022	170	0.025	170	0.029	170	0.031	200	0.040
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	220	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	220	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	220	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	220	0.045
	180	0.013	200	0.018	210	0.029	220	0.030	220	0.033	220	0.036	220	0.045
	120	0.005	130	0.005	130	0.008	140	0.010	140	0.011	150	0.012	150	0.021
	120	0.010	130	0.014	130	0.020	140	0.022	140	0.024	150	0.026	150	0.035
	120	0.010	130	0.014	130	0.020	140	0.022	140	0.024	150	0.026	150	0.035
	120	0.005	130	0.005	130	0.008	140	0.010	140	0.011	150	0.012	150	0.021

NEW

Process

ACCURATE AND EFFICIENT MILLING

Coolant type, pressure and filtration

Coolant: for best results, Mikron Tool recommends the use of cutting oil as coolant. Alternatively, emulsion of 8% or more with EP-Additives (Extreme-Pressure-Additives) can be used as well.

Filter: the large cooling channels permit the use of a standard filter with filter quality of ≤ 0.05 mm.


Coolant pressure: at least 15 bar coolant pressure is required to achieve reliable milling. High pressure is generally better for the cooling and flushing effect.

Revolution	[rpm]	$\leq 10'000$	$> 10'000$
Minimal pressure	[bar]	15	30

Tool holders

For optimal use of the tool, Mikron Tool recommends a shrink fit collet as per DIN 69871 or as an alternative a hydraulic tool holder. For additional information regarding tool holding refer to "Technical Information" in our main catalogue.


Maximum plunge angles in linear ramp or helical interpolation

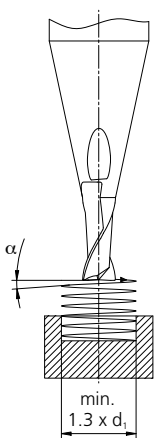

Material		α - Linear ramp	α - Helical interpolation
P	Unalloyed carbon steel	45°	47°
	Low alloyed steel	45°	47°
	High alloyed tool steel	27°	28°
M	Stainless steel ferritic	45°	47°
	Stainless steel martensitic	27°	28°
	Stainless steel martensitic - PH	27°	28°
	Stainless steel austenitic	45°	47°
K	Cast iron	45°	47°
	Aluminium alloy wrought	45°	47°
N	Aluminium alloy cast	45°	47°
	Copper	45°	47°
	Brass lead free	45°	47°
	Brass, Bronze Rm < 400 N/mm ²	45°	47°
	Bronze Rm < 600 N/mm ²	45°	47°
	S ₁ Super alloys	14°	15°
	S ₂ Titanium pure and titanium alloys	14°	15°
S ₃ CrCo alloys	27°	28°	

Milling process

A. Milling of keyways - only for type A

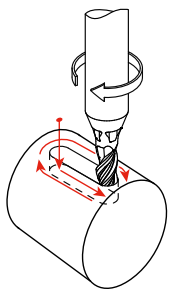

Mikron Tool recommends a machining process in 3 steps to guarantee the tolerance of the slot:


- 1. Plunge milling or plunging with a linear ramp
- 2. Slot milling
- 3. Side milling (finishing milling)

Mikron Tool generally recommends the time and space saving plunge milling (vertical). As an alternative, plunging with a linear ramp is also possible.


1. Plunge milling

or

Linear ramp




When plunge milling, an increase of the drilling diameter of approx. 0.05 mm respect to the tool diameter needs to be calculated. The maximum milling depth is $2.5 \times d_1$ ($a_{p,max} = 1 \times d_1$). For data regarding feed $f_{z,p}$ refer to cutting data for plunge milling (page 16).




The maximum plunge angle α depends on the material and cannot be overcut (see table on the left). For data regarding feed $f_{z,s}$ refer to cutting data for keyway milling (page 16).

2. Slot milling

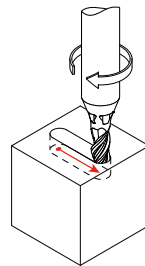

Attention: a finishing operation is provided after slot milling. For data regarding feed $f_{z,s}$ refer to cutting data for slot milling (page 16). For the corresponding selection of tool (diameter) refer to the table "Tool selection" (page 38).

3. Side milling

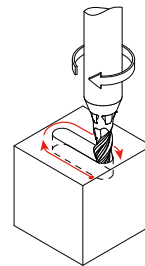


A finishing operation is necessary to reach the required tolerance and highest squareness.

NEW



Process

B. Milling of through slots

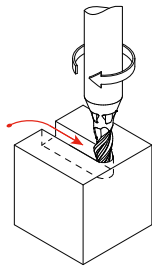

When milling through slots, the maximum cutting parameters can be applied. Refer to the cutting data page 18 / page 28.


C. Plunge milling



With CrazyMill Cool P&S, plunge milling (drilling) can be executed in two versions:


- 1. Direct plunge milling
- 2. Plunging with helical interpolation

1. Direct plunge milling




When plunge milling, an increase of the drilling diameter of approx. 0.05 mm respect to the tool diameter needs to be calculated. The maximum milling depth is $2.5 \times d_1$ - type A / $5 \times d_1$ - type C ($a_{p,max} = 1 \times d_1$). For data regarding feed $f_{z,p}$ refer to cutting data for plunge milling (page 16 / page 26).

2. Plunging with helical interpolation



The maximum plunge angle α depends on the material and cannot be overcut (see table page 34). For data regarding feed $f_{z,s}$ refer to cutting data for keyway milling (page 16 / page 26). Attention: the minimum diameter of the hole is $d_{hole} = 1.3 \times d_{tool}$.


D. Linear ramp



The maximum plunge angle α depends on the material and cannot be overcut (see table page 34). For data regarding feed $f_{z,s}$ refer to cutting data for keyway milling (page 16 / page 26).


E. Side milling

Semi-finishing

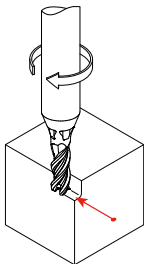

Recommended cutting parameters:
 v_c and f_z = as specified in the cutting data table
 $a_p = 1 - 2 \times d$
 Type A: $a_e = 0.2 \times d$
 Type C: $a_e = 0.1 \times d$

Finishing

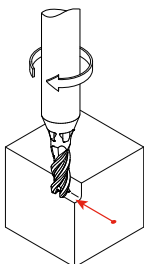

Recommended cutting parameters:
 v_c and f_z = as specified in the cutting data table
 Type A: $a_p = 2.5 \times d$; $a_e = 0.05 - 0.10 \times d$ depending on required surface quality
 Type C: $a_p = 2 \times d$; $a_e = 0.02 - 0.05 \times d$ depending on required surface quality

w Slot [mm]	w Slot [inch]	d ₁ Tool [mm][inch]	l _{1,max} [mm]	r [mm][inch]	Item number
3.0		2.6	6.50	0.20	2.CMC42.A2Z3.260.1
		2.6	6.50	0.50	2.CMC42.A3Z3.260.1
		2.7	6.75	0.20	2.CMC42.A2Z3.270.1
		2.7	6.75	0.50	2.CMC42.A3Z3.270.1
		2.8	7.00	0.20	2.CMC42.A2Z3.280.1
3.1		2.8	7.00	0.50	2.CMC42.A3Z3.280.1
		2.6	6.50	0.20	2.CMC42.A2Z3.260.1
		2.6	6.50	0.50	2.CMC42.A3Z3.260.1
		2.7	6.75	0.20	2.CMC42.A2Z3.270.1
		2.7	6.75	0.50	2.CMC42.A3Z3.270.1
		2.8	7.00	0.20	2.CMC42.A2Z3.280.1
		2.8	7.00	0.50	2.CMC42.A3Z3.280.1
3.175	1/8	2.9	7.25	0.20	2.CMC42.A2Z3.290.1
		2.9	7.25	0.50	2.CMC42.A3Z3.290.1
		2.7	6.75	0.20	2.CMC42.A2Z3.270.1
		2.7	6.75	0.50	2.CMC42.A3Z3.270.1
		2.8	7.00	0.20	2.CMC42.A2Z3.280.1
3.2		2.8	7.00	0.50	2.CMC42.A3Z3.280.1
		2.9	7.25	0.20	2.CMC42.A2Z3.290.1
		2.9	7.25	0.50	2.CMC42.A3Z3.290.1
		3.0	7.50	0.20	2.CMC42.A2Z3.300.1
		3.0	7.50	0.50	2.CMC42.A3Z3.300.1
		2.8	7.00	0.20	2.CMC42.A2Z3.280.1
		2.8	7.00	0.50	2.CMC42.A3Z3.280.1
3.3		2.9	7.25	0.20	2.CMC42.A2Z3.290.1
		2.9	7.25	0.50	2.CMC42.A3Z3.290.1
		3.0	7.50	0.20	2.CMC42.A2Z3.300.1
		3.0	7.50	0.50	2.CMC42.A3Z3.300.1
		3.1	7.75	0.20	2.CMC42.A2Z3.310.1
3.4		3.1	7.75	0.50	2.CMC42.A3Z3.310.1
		2.9	7.25	0.20	2.CMC42.A2Z3.290.1
		2.9	7.25	0.50	2.CMC42.A3Z3.290.1
		3.0	7.50	0.20	2.CMC42.A2Z3.300.1
		3.0	7.50	0.50	2.CMC42.A3Z3.300.1
3.5		3.1	7.75	0.20	2.CMC42.A2Z3.310.1
		3.1	7.75	0.50	2.CMC42.A3Z3.310.1
		1/8	7.94	0.254	2.CMC.PSRA2Z3.F18
		1/8	7.94	0.381	2.CMC.PSRA3Z3.F18
		3.3	8.25	0.20	2.CMC42.A2Z3.330.1
		3.3	8.25	0.50	2.CMC42.A3Z3.330.1
		3.0	7.50	0.20	2.CMC42.A2Z3.300.1
3.6		3.0	7.50	0.50	2.CMC42.A3Z3.300.1
		3.1	7.75	0.20	2.CMC42.A2Z3.310.1
		3.1	7.75	0.50	2.CMC42.A3Z3.310.1
		1/8	7.94	0.254	2.CMC.PSRA2Z3.F18
		1/8	7.94	0.381	2.CMC.PSRA3Z3.F18
		3.3	8.25	0.20	2.CMC42.A2Z3.330.1
		3.3	8.25	0.50	2.CMC42.A3Z3.330.1




w Slot [mm]	w Slot [inch]	d ₁ Tool [mm][inch]	l _{1,max} [mm]	r [mm][inch]	Item number
3.7		3.1	7.75	0.20	2.CMC42.A2Z3.310.1
		3.1	7.75	0.50	2.CMC42.A3Z3.310.1
		1/8	7.94	0.254	2.CMC.PSRA2Z3.F18
		1/8	7.94	0.381	2.CMC.PSRA3Z3.F18
		3.3	8.25	0.20	2.CMC42.A2Z3.330.1
		3.3	8.25	0.50	2.CMC42.A3Z3.330.1
3.8		3.3	8.25	0.20	2.CMC42.A2Z3.330.1
		3.3	8.25	0.50	2.CMC42.A3Z3.330.1
3.9		3.3	8.25	0.20	2.CMC42.A2Z3.330.1
		3.3	8.25	0.50	2.CMC42.A3Z3.330.1
		3.7	9.25	0.20	2.CMC42.A2Z3.370.1
3.968	5/32	3.7	9.25	0.50	2.CMC42.A3Z3.370.1
		3.3	8.25	0.20	2.CMC42.A2Z3.330.1
		3.3	8.25	0.50	2.CMC42.A3Z3.330.1
4.0		3.7	9.25	0.20	2.CMC42.A2Z3.370.1
		3.7	9.25	0.50	2.CMC42.A3Z3.370.1
4.1		3.7	9.25	0.20	2.CMC42.A2Z3.370.1
		3.7	9.25	0.50	2.CMC42.A3Z3.370.1
4.2		3.7	9.25	0.20	2.CMC42.A2Z3.370.1
		3.7	9.25	0.50	2.CMC42.A3Z3.370.1
		5/32	9.92	0.254	2.CMC.PSRA2Z3.F532
		5/32	9.92	0.381	2.CMC.PSRA3Z3.F532
		4.0	10.00	0.20	2.CMC42.A2Z3.400.1
4.3		4.0	10.00	0.50	2.CMC42.A3Z3.400.1
		3.7	9.25	0.20	2.CMC42.A2Z3.370.1
		3.7	9.25	0.50	2.CMC42.A3Z3.370.1
		5/32	9.92	0.254	2.CMC.PSRA2Z3.F532
		5/32	9.92	0.381	2.CMC.PSRA3Z3.F532
4.4		4.0	10.00	0.20	2.CMC42.A2Z3.400.1
		4.0	10.00	0.50	2.CMC42.A3Z3.400.1
		3.7	9.25	0.20	2.CMC42.A2Z3.370.1
		3.7	9.25	0.50	2.CMC42.A3Z3.370.1
		5/32	9.92	0.254	2.CMC.PSRA2Z3.F532
4.5		5/32	9.92	0.381	2.CMC.PSRA3Z3.F532
		4.0	10.00	0.20	2.CMC42.A2Z3.400.1
		4.0	10.00	0.50	2.CMC42.A3Z3.400.1
		3.7	9.25	0.20	2.CMC42.A2Z3.370.1
		3.7	9.25	0.50	2.CMC42.A3Z3.370.1
4.6		4.0	10.00	0.20	2.CMC42.A2Z3.400.1
		4.0	10.00	0.50	2.CMC42.A3Z3.400.1
		4.3	10.75	0.20	2.CMC42.A2Z3.430.1
		4.3	10.75	0.50	2.CMC42.A3Z3.430.1
		4.0	10.00	0.20	2.CMC42.A2Z3.400.1
4.7		4.0	10.00	0.50	2.CMC42.A3Z3.400.1
		4.3	10.75	0.20	2.CMC42.A2Z3.430.1
		4.3	10.75	0.50	2.CMC42.A3Z3.430.1
		4.0	10.00	0.20	2.CMC42.A2Z3.400.1
		4.0	10.00	0.50	2.CMC42.A3Z3.400.1
4.762	3/16	4.0	10.00	0.20	2.CMC42.A2Z3.400.1
		4.0	10.00	0.50	2.CMC42.A3Z3.400.1
		4.3	10.75	0.20	2.CMC42.A2Z3.430.1
4.8		4.3	10.75	0.50	2.CMC42.A3Z3.430.1
		4.0	10.00	0.20	2.CMC42.A2Z3.400.1
		4.0	10.00	0.50	2.CMC42.A3Z3.400.1

NEW

Process CrazyMill Cool P&S - Type A

THE RIGHT TOOL FOR KEYWAY SLOTTING

Tool selection



w Slot [mm]	w Slot [inch]	d ₁ Tool [mm][inch]	l _{1,max} [mm]	r [mm][inch]	Item number
4.9		4.3	10.75	0.20	2.CMC42.A2Z3.430.1
		4.3	10.75	0.50	2.CMC42.A3Z3.430.1
		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
5.0		4.3	10.75	0.20	2.CMC42.A2Z3.430.1
		4.3	10.75	0.50	2.CMC42.A3Z3.430.1
		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1
5.1		4.3	10.75	0.20	2.CMC42.A2Z3.430.1
		4.3	10.75	0.50	2.CMC42.A3Z3.430.1
		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1
5.2		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1
		5.0	12.50	0.20	2.CMC42.A2Z3.500.1
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1
5.3		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1
		5.0	12.50	0.20	2.CMC42.A2Z3.500.1
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1
5.4		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1
		5.0	12.50	0.20	2.CMC42.A2Z3.500.1
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1
5.5		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1
		5.0	12.50	0.20	2.CMC42.A2Z3.500.1
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1
5.6		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1

w Slot [mm]	w Slot [inch]	d ₁ Tool [mm][inch]	l _{1,max} [mm]	r [mm][inch]	Item number		
5.560	7/32	4.7	11.75	0.20	2.CMC42.A2Z3.470.1		
		4.7	11.75	0.50	2.CMC42.A3Z3.470.1		
		3/16	11.91	0.254	2.CMC.PSRA2Z3.F316		
		3/16	11.91	0.381	2.CMC.PSRA3Z3.F316		
		4.8	12.00	0.20	2.CMC42.A2Z3.480.1		
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1		
		5.0	12.50	0.20	2.CMC42.A2Z3.500.1		
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1		
		5.3	13.25	0.20	2.CMC42.A2Z3.530.1		
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1		
		5.6		4.7	11.75	0.20	2.CMC42.A2Z3.470.1
				4.7	11.75	0.50	2.CMC42.A3Z3.470.1
3/16	11.91			0.254	2.CMC.PSRA2Z3.F316		
3/16	11.91			0.381	2.CMC.PSRA3Z3.F316		
4.8	12.00			0.20	2.CMC42.A2Z3.480.1		
4.8	12.00			0.50	2.CMC42.A3Z3.480.1		
5.0	12.50			0.20	2.CMC42.A2Z3.500.1		
5.0	12.50			0.50	2.CMC42.A3Z3.500.1		
5.3	13.25			0.20	2.CMC42.A2Z3.530.1		
5.3	13.25			0.50	2.CMC42.A3Z3.530.1		
5.7				4.8	12.00	0.20	2.CMC42.A2Z3.480.1
				4.8	12.00	0.50	2.CMC42.A3Z3.480.1
		5.0	12.50	0.20	2.CMC42.A2Z3.500.1		
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1		
		5.3	13.25	0.20	2.CMC42.A2Z3.530.1		
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1		
5.8		4.8	12.00	0.20	2.CMC42.A2Z3.480.1		
		4.8	12.00	0.50	2.CMC42.A3Z3.480.1		
		5.0	12.50	0.20	2.CMC42.A2Z3.500.1		
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1		
		5.3	13.25	0.20	2.CMC42.A2Z3.530.1		
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1		
5.9		5.0	12.50	0.20	2.CMC42.A2Z3.500.1		
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1		
		5.3	13.25	0.20	2.CMC42.A2Z3.530.1		
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1		
		7/32	13.90	0.381	2.CMC.PSRA2Z3.F732		
		7/32	13.90	0.762	2.CMC.PSRA3Z3.F732		
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1		
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1		
6.0		5.0	12.50	0.20	2.CMC42.A2Z3.500.1		
		5.0	12.50	0.50	2.CMC42.A3Z3.500.1		
		5.3	13.25	0.20	2.CMC42.A2Z3.530.1		
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1		
		7/32	13.90	0.381	2.CMC.PSRA2Z3.F732		
		7/32	13.90	0.762	2.CMC.PSRA3Z3.F732		
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1		
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1		
6.1		5.3	13.25	0.20	2.CMC42.A2Z3.530.1		
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1		
		7/32	13.90	0.381	2.CMC.PSRA2Z3.F732		
		7/32	13.90	0.762	2.CMC.PSRA3Z3.F732		
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1		
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1		

w Slot [mm]	w Slot [inch]	d ₁ Tool [mm] [inch]	l _{1,max} [mm]	r [mm] [inch]	Item number
6.2		5.3	13.25	0.20	2.CMC42.A2Z3.530.1
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1
		7/32	13.90	0.381	2.CMC.PSRA2Z3.F732
		7/32	13.90	0.762	2.CMC.PSRA3Z3.F732
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
6.3		5.3	13.25	0.20	2.CMC42.A2Z3.530.1
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1
		7/32	13.90	0.381	2.CMC.PSRA2Z3.F732
		7/32	13.90	0.762	2.CMC.PSRA3Z3.F732
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
6.350	1/4	5.3	13.25	0.20	2.CMC42.A2Z3.530.1
		5.3	13.25	0.50	2.CMC42.A3Z3.530.1
		7/32	13.90	0.381	2.CMC.PSRA2Z3.F732
		7/32	13.90	0.762	2.CMC.PSRA3Z3.F732
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
6.4		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
6.5		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
6.6		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
6.7		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
6.7		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1

w Slot [mm]	w Slot [inch]	d ₁ Tool [mm] [inch]	l _{1,max} [mm]	r [mm] [inch]	Item number
6.8		5.7	14.25	0.20	2.CMC42.A2Z3.570.1
		5.7	14.25	0.50	2.CMC42.A3Z3.570.1
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		6.9		6.0	15.00
6.0	15.00			0.50	2.CMC42.A3Z3.600.1
6.0	15.00			1.00	2.CMC42.A4Z3.600.1
1/4	15.88			0.381	2.CMC.PSRA2Z3.F14
1/4	15.88			0.762	2.CMC.PSRA3Z3.F14
7.0		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
7.1		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
7.2		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
7.3		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
7.4		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
7.5		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		6.0	15.00	0.20	2.CMC42.A2Z3.600.1
		6.0	15.00	0.50	2.CMC42.A3Z3.600.1
7.6		6.0	15.00	1.00	2.CMC42.A4Z3.600.1
		1/4	15.88	0.381	2.CMC.PSRA2Z3.F14
		1/4	15.88	0.762	2.CMC.PSRA3Z3.F14
		1/4	15.88	1.524	2.CMC.PSRA4Z3.F14
		8.0	20.00	0.20	2.CMC42.A2Z3.800.1
8.2	20.00	0.50	2.CMC42.A3Z3.800.1		
9.6	20.00	1.50	2.CMC42.A4Z3.800.1		

CrazyMill Cool P&S Square - Z3



ALREADY AVAILABLE: SQUARE VERSION




This product is well established on the market. Due to its special features, great customer benefits are guaranteed specially for difficult-to-machine materials such as stainless steels, titanium, CoCr alloys and super alloys. The design of the cutting edges permits to machine with the same advantages as with the corner radius version. This endmill can plunge perpendicularly into the material and is well adapted for milling of slots, pockets and sides in minimal spaces.

Advantages

- **SHORT MACHINING TIME** | Up to 5 times faster
- **LONG TOOL LIFE** | Up to 5 times longer
- **HIGH DEGREE OF PROCESS RELIABILITY** | Thanks to greater coolant flow
- **HIGH DEGREE OF PRECISION** | Thanks to specific cutting geometry

Item table, machining process and cutting data

For the square version, please refer to ToolBook 2020 on page 540 as well as on our website www.mikrontool.com for all details on item table, machining process and cutting data.

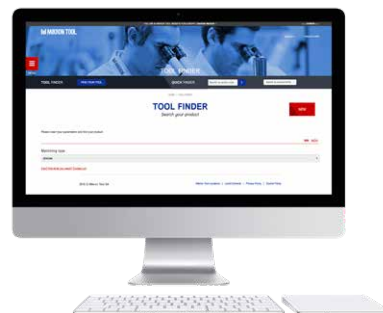

Headquarter and Production

MIKRON SWITZERLAND AG, AGNO

Division Tool

Via Campagna 1

6982 Agno

Switzerland

Phone +41 91 610 40 00

mtomikron.com

Production and Regrinding

MIKRON GMBH ROTTWEIL

Abteilung Werkzeuge

Berner Feld 71

78628 Rottweil

Germany

Phone +49 741 5380 450

info.mtr@mikron.com

North and South America Sales

MIKRON CORP. MONROE

200 Main Street

Monroe, CT 06468

USA

Phone +1 203 261 3100

mmonroe@mikron.com

China Sales

MIKRON TOOL SHANGHAI LTD.

Room A209, Building 3,

No. 526, 3rd East Fute Road,

Shanghai, 200131

P. R. China

Phone +86 21 2076 5671

mtc@mikron.com

地址: 中国 (上海) 自由贸易试验区

中国上海市富特东三路526号3号楼第二层

A209室

邮编: 200131

www.mikrontool.com

www.youtube.com/mikrongroup

Information and technical data are liable to changes without prior notification.

Mikron® is a trademark of Mikron Holding AG, Biel (Switzerland).



2.MKTG.00653-11.2021 - EU - EN